

Candidate Management Procedures for Indian Ocean skipjack tuna

Prepared for the Indian Ocean Tuna Commission

May 2, 2024

Report prepared by:
Charles T T Edwards

For any information regarding this report please
contact the author at:

CESCAPE Consultancy Services
South Africa & New Zealand

Email: cescapecs@gmail.com
Telephone: +64-21-575879

CESCAPE Client Report

Client project code: MTF/INT/661/MUL (TFAA970097099)
Project name: Fisheries Management Strategy Evaluation
Project end date: June 30, 2024
Date of report: May 2, 2024
Prepared for: 8th Session of the IOTC Technical Committee on Management Procedures, Bangkok, Thailand, 10 - 12 May 2024

© CESCAPE Consultancy Services 2024. To the extent permitted by law, all rights are reserved and no part of this publication may be reproduced or copied in any form without the permission of the copyright owner. Such permission will only be given in accordance with the terms of the client's contract with CESCAPE.

Executive Summary

This document provides background information to inform the Commission's decision on the adoption of a skipjack tuna Management Procedure (MP), as outlined in the Commission workplan. Two MP types are presented. Both have very similar performance and are likely to meet the Commission's objectives with a high probability. Each MP-type was tuned to meet management objectives for skipjack with a 50%, 60% or 70% probability between 2034 and 2038. Tuning was conducted assuming either a symmetric or asymmetric limit to the allowable TAC change. This yielded a total of twelve candidate MPs. Simulation testing indicated that the tuning criteria will determine the overall stock status and average Total Allowable Catch (TAC). The MP-type determined the stability of the TAC over time, with the more stable MP-type also having a lower maximum possible catch. For the asymmetric TAC change limit, a smaller reduction in the TAC was allowed, but this led to more frequent changes over time.

Possible decisions to be made by the Commission include:

1. Selection of the level of performance that the Commission wishes to achieve in the future: 50%, 60%, or 70% probability of meeting management objectives between 2034 and 2038.
2. Selection of one of the two MP-types, indicating whether priority should be given to catch stability or the maximum possible catch;
3. Selection of a 10% or 15% limit to the reduction of the TAC.

Selection of the performance level (1) and desired stability (2) will have a greater impact on the overall outcome than selection of the change limit (3), and will help to identify which of the twelve candidate MPs should be preferred.

Adoption of an MP for skipjack will help improve the standard for skipjack tuna fishery management for the Indian Ocean and globally.

Introduction

In 2016, the IOTC adopted Resolution 16/02 (IOTC, 2016), which described a harvest control rule (HCR) to be used for setting a recommended total allowable catch (TAC) for skipjack tuna (SKJ), based on outputs from the stock assessment. This stock assessment is conducted in the same year that the HCR is implemented, typically using catch data up to and including the previous year. Each associated catch recommendation is valid for the subsequent three year period. Using outputs from the 2017 assessment (Fu, 2017), the HCR was first implemented at the end of that year to give a recommended catch limit for 2018–2020 of 470 thousand tonnes (SC, 2017). A second implementation of the HCR was conducted in 2020 (SC, 2020), based on an updated stock assessment by Fu (2020). The outputs were used to calculate a recommended catch limit for 2021–2023 of 514 thousand tonnes (IOTC, 2021). The stock assessment was repeated in 2023 (Fu, 2023), yielding a recommended catch limit for 2024–2026 of 629 thousand tonnes (SC, 2023). The realised catch from the fishery consistently exceeds the recommended limit by 15% – 30% each year (Table 1).

Table 1: Recommended catch from current HCR and realised catches used by Fu (2023) in tonnes. *Note that the 2023 catch is predicted by the stock assessment based on current exploitation rates and is not an empirical value.

Year	Recommended catch	Realised catch	Overcatch
2018	470,029	606,134	29%
2019	470,029	590,388	26%
2020	470,029	547,258	16%
2021	513,572	655,115	28%
2022	513,572	648,697	26%
2023	513,572	*596,511	*16%
2024	628,606	–	–
2025	628,606	–	–
2026	628,606	–	–

As part of CMM 16/02 and 21/03 the IOTC has committed to a program of development and refinement of the HCR, and to subject it to simulation-based evaluation. An HCR that has the data inputs specified and which has been simulation tested is referred to as a Management Procedure (MP). The cyclical process of simulation testing, review and selection of MPs is known as Management Procedure Evaluation, or Management Strategy Evaluation (MSE), with the latter terminology preferred by the IOTC. This work has been on-going since 2019, with candidate MPs being repeatedly tested and reviewed by the WPM and TCMP.

This document describes twelve candidate MPs for SKJ and summarises the results from simulation testing of their performance. The intention is to provide sufficient information to facilitate the decision-making processes of the Commission in relation to the adoption of a SKJ MP in the IOTC.

MSE summary

The purpose of MSE is to evaluate candidate MPs against a range of possible conditions of the population and fishery dynamics. It aims to find the best performing MP that meets the management objectives of the Commission and is robust to a range of uncertainties.

Operating Models

The operating models (OMs) are the set of simulation models designed to include the plausible range of fishery dynamics and which are used to simulation test the MPs. The SKJ OMs replicate the set of stock assessment models developed by Fu (2023). This set of models is considered to represent our best understanding of the resource dynamics and how it will respond to harvesting in the future. The “reference set” of models includes 36 alternative models.

The reference set of operating models were used to simulation test the performance of candidate MPs over an 18 year projection period (2023 to 2040 inclusive). The recommended catch from 2023 to 2026 was fixed based on outputs from the current HCR (Table 1), with candidate MPs being implemented to recommend the catch from 2027 onwards, at three year intervals. Simulated catch rate data was provided as an input to the MP with a two-year total lag between availability of the data and setting of a TAC (i.e., a one year data lag and one-year implementation lag). Future recruitment was assumed to follow similar dynamics to those estimated by the stock assessment.

Robustness testing was used to further investigate performance of the tuned MPs under more extreme but still plausible scenarios. These are less likely to be indicative of realised future performance but help to understand MP performance should the reference set turn out to be an optimistic representation of resource dynamics. A single robustness test was performed: an overcatch of 20% or 30% (see Table 1) for all future years (2023 to 2040).

Management Objectives

The overall objective of the Commission is the conservation and optimum utilisation of tuna stocks in the IOTC area of competence. Specific management objectives outlined in Resolution 15/10 for key target species (IOTC, 2015), including SKJ, are to maintain the biomass at or above biomass levels required to produce MSY (B_{MSY}) and maintain the exploitation rate at or below the associated level (E_{MSY}). Because of difficulties in estimating MSY for SKJ, management targets have been conventionally set (following Resolutions 16/02 and 21/03) at the biomass and exploitation associated with a 40% depletion below the unexploited equilibrium population size (i.e., $B_{40\%}$ and $E_{40\%}$ respectively; IOTC, 2015, 2016).

Candidate Management Procedures

The management target is defined as the exploitation rate being less than $E_{40\%}$ (no overfishing) and biomass being greater than $B_{40\%}$ (not overfished). Three objectives consistent with this management target determined the minimum performance required of the MP. To be considered, the MP must meet one of the following:

- A 50% probability of meeting management objectives between 2034-2038.
- A 60% probability of meeting management objectives between 2034-2038.
- A 70% probability of meeting management objectives between 2034-2038.

The target “quadrant” was defined by the management objectives above. A process of “tuning” was used to select MPs that matched the listed 50%, 60% and 70% probabilities of being in this target quadrant. In common with other IOTC stocks, if an MP matched one of these criteria then it was selected as a “candidate” MP for further consideration.

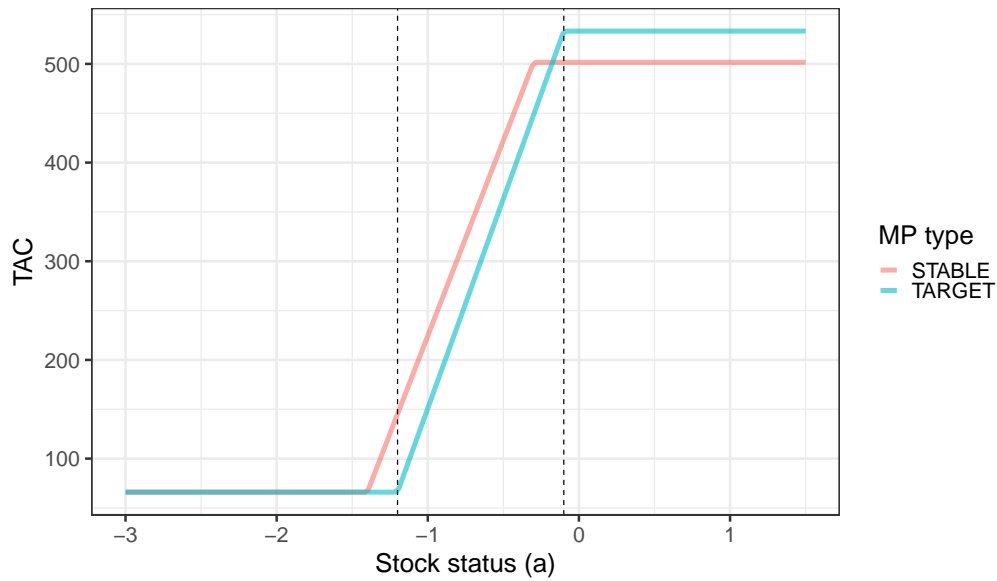


Figure 1: Harvest control rule for candidate MPs. The HCR outputs a recommended TAC based on a stock status indicator (a). The indicator is calculated from standardised catch rate indices from the Maldivian PL and European PSLs fisheries (Appendix A). Vertical dashed lines indicate the value of a at depletion levels of $B_{10\%}$ and $B_{40\%}$. Two MP-types are shown. The TARGET MP-type uses values of a at $B_{10\%}$ and $B_{40\%}$ to define the shape of the control rule. The STABLE MP-type is designed to create a more stable TAC time series. The STABLE MP-type has a lower maximum catch compared to the TARGET MP-type, when tuned to the same tuning criteria (Table A1).

All candidate MPs presented use a step-linear HCR to set a TAC based on standardised catch rate indices from the Maldivian PL and European PSLs fisheries. These two catch rate indices are combined to create an index of population status (depletion). The relationship between stock status, as measured by this index, and the TAC is shown in Figure 1. The MPs are described in more detail in Appendix A.

Two MP-types were considered (Figure 1). For each of the tuning criteria, both MP-types were tuned by changing the value of the maximum possible catch. The inflection points for each MP-type were fixed during tuning. This was repeated assuming a symmetric (SYM: 15% up, 15% down) change limit for the TAC, or an asymmetric (ASY: 15% up, 10% down) change limit.

All MPs:

- assume a 3-year management cycle and calculate a total allowable catch (TAC) for the entire IOTC management area;
- assume a minimum artisanal catch that is not subject to TAC restrictions;
- assume a 2-year total lag between the availability of catch rate data and implementation of a TAC.

Results

Tuning of the MPs yielded the twelve candidate MPs in Table 2, which are listed with their summary performance diagnostics. Performance for the same MPs in the presence of overcatch is reported in Tables 4 and 5. A full set of diagnostics for the reference set of OMs is provided in Appendix B, and for the overcatch robustness testing in Appendix C.

Overall MP properties:

- In all cases there is expected to be a large reduction in the TAC in the first year of MP implementation (2027; Figure A7);
- Overall stock status and average catch are primarily determined by tuning to 50%, 60% or 70% criteria, not by the MP-type or TAC change limit;
- The STABLE MP-type is more stable and typically has a higher average TAC;
- The TARGET MP-type has a higher possible TAC (Figure 1 and Table A1);
- The TARGET MP-type may result in a higher stock biomass in the presence of TAC overcatch;
- The ASY TAC change limit led to more frequent TAC changes but can improve overall stability for the less stable TARGET MP-type and when there is overcatch of the TAC.

Overall, the TAC change limit had the smallest effect on outcome. Stock status and catch stability were primarily determined by the tuning criteria and MP-type.

Simulation results listed in Table 2 and Appendix B indicate that the tuning criteria can be ranked according to the desired stock status and TAC. The 50% tuning yields the highest stock depletion (lowest stock biomass) with the highest catch. The 70% criteria yields the lowest depletion (highest stock biomass) with the lowest catch. The STABLE MP-type generates a more stable TAC over time, which can lead to a higher average catch, but has a lower maximum possible catch compared to the TARGET MP-type (Figure 1 and Table A1). When overcatch of the TAC is assumed (Appendix C) a less stable (more reactive) MP is preferred, with the TARGET MP-type giving better outcomes for stock status (Tables 4 and 5).

The asymmetric change limit imposed a lower change limit on TAC reductions and this led to a small increase in the frequency of TAC changes over time. For the less stable TARGET MP-type, or when there is high TAC overcatch, the ASY change limit led to a more stable TAC timeseries, at the expense of stock status.

As expected, performance of MPs in reaching management objectives deteriorates in the presence of a TAC overcatch. MPs tuned to a 70% probability generally perform better (are more robust), as do the more reactive MPs (TARGET MP-type with a symmetric change limit).

These observations are summarised in Table 3, which lists their qualitative performance.

Table 2: Summary diagnostic outputs (REFERENCE SET) for selection of index-based MPs (see Table A1 for the list of MP definitions). MP's were STABLE or TARGET (see Figure 1), imposed symmetric (SYM) or asymmetric (ASY) change limits on the TAC, and were tuned to the 50%, 60% or 70% tuning criteria. Darker shading indicates better performance.

MP	Total Catch	Lower TAC Quantile	Number of TAC changes	Average TAC change	Pr. SSB above target	Pr. SSB above MSY
MP-STABLE-ASY-50%	530.46	517.14	3	4.18	0.38	0.92
MP-STABLE-ASY-60%	521.3	512.86	3	4.08	0.43	0.92
MP-STABLE-ASY-70%	512.05	507.41	3	4.91	0.48	0.93
MP-STABLE-SYM-50%	529.63	518.24	3	3.24	0.41	0.94
MP-STABLE-SYM-60%	523.29	513.93	2	3.43	0.46	0.94
MP-STABLE-SYM-70%	513.78	506.28	2	4.02	0.54	0.96
MP-TARGET-ASY-50%	529.12	515.03	5	8.16	0.38	0.93
MP-TARGET-ASY-60%	520.27	509.66	5	7.92	0.43	0.94
MP-TARGET-ASY-70%	511.81	504.91	5	7.67	0.49	0.94
MP-TARGET-SYM-50%	519.22	505.62	5	9.41	0.41	0.95
MP-TARGET-SYM-60%	511.55	499.73	5	9.38	0.51	0.96
MP-TARGET-SYM-70%	503.87	492.17	4	8.53	0.54	0.96

Table 3: Qualitative performance criteria and recommendations for MP design considering the reference set and overcatch robustness testing.

Criteria	MP-type	TAC change limit	Tuning objective (50%, 60%, 70% prob. of being in the target quadrant)
Maximum possible catch	TARGET	–	50%
Maximum average catch	STABLE	–	50%
Catch stability	STABLE	ASY	70%
Stock status	TARGET	SYM	70%

Table 4: Robustness testing summary diagnostic outputs (OVERCATCH (20%)) for selection of MPs (see Table A1 for the list of MP definitions).

	Total Catch	Lower TAC Quantile	Number of TAC changes	Average TAC change	Pr. SSB above target	Pr. SSB above MSY
MP-STABLE-ASY-50%	516.01	504.13	5	7.63	0.03	0.75
MP-STABLE-ASY-60%	511.81	501.44	5	7.76	0.06	0.75
MP-STABLE-ASY-70%	506.52	494.96	5	7.75	0.09	0.76
MP-STABLE-SYM-50%	504.96	486.46	5	10.52	0.05	0.76
MP-STABLE-SYM-60%	501.79	484.41	5	10.61	0.06	0.77
MP-STABLE-SYM-70%	495.11	479.71	5	10.21	0.1	0.78
MP-TARGET-ASY-50%	505.29	492.32	5	9.08	0.09	0.76
MP-TARGET-ASY-60%	502.75	488.63	5	9.06	0.1	0.77
MP-TARGET-ASY-70%	499.18	483.58	5	9.03	0.12	0.77
MP-TARGET-SYM-50%	487.18	473.79	5	11.97	0.17	0.8
MP-TARGET-SYM-60%	483.12	467.59	5	12.12	0.2	0.81
MP-TARGET-SYM-70%	479.73	464.54	5	12.23	0.23	0.82

Table 5: Robustness testing summary diagnostic outputs (OVERCATCH (30%)) for selection of MPs (see Table A1 for the list of MP definitions).

	Total Catch	Lower TAC Quantile	Number of TAC changes	Average TAC change	Pr. SSB above target	Pr. SSB above MSY
MP-STABLE-ASY-50%	511.73	498.97	5	8.1	0.01	0.7
MP-STABLE-ASY-60%	506.87	497.04	5	8.12	0.01	0.71
MP-STABLE-ASY-70%	502.47	492.51	5	8.33	0.03	0.71
MP-STABLE-SYM-50%	500.69	483	5	10.85	0.01	0.71
MP-STABLE-SYM-60%	497.54	481.07	5	10.86	0.02	0.72
MP-STABLE-SYM-70%	491.82	477.13	5	10.53	0.02	0.73
MP-TARGET-ASY-50%	502.82	487.01	5	8.86	0.03	0.71
MP-TARGET-ASY-60%	498.62	483.58	5	9.1	0.04	0.71
MP-TARGET-ASY-70%	494.32	483.58	5	9.38	0.05	0.72
MP-TARGET-SYM-50%	481.06	465.29	5	11.81	0.08	0.75
MP-TARGET-SYM-60%	479.11	462.28	5	12.17	0.1	0.75
MP-TARGET-SYM-70%	474.16	460.23	5	12.08	0.13	0.77

Actions for the Commission

Possible decisions for the Commission include:

1. Selection of the management objective that the MP will be tuned to: a 50%, 60% or 70%, probability of meeting the management target. This will determine the stock status and overall catch;
2. Selection of either the TARGET or STABLE MP-type. This will determine whether stability of the TAC over time should be given preference over the maximum allowable catch;
3. Selection of a 10% or 15% limit to the reduction of the TAC. This will have a small impact on TAC stability, with a more restrictive change limit likely leading to more frequent TAC changes.

Selection from these alternate options will identify which of the twelve candidate MPs should be preferred.

Acknowledgements

The work has received welcome feedback from members of the WPM and TCMP. I am grateful in particular to Dan Fu (IOTC) for providing the SS III files, to Iago Mosqueira (Wageningen University & Research) and Alistair Dunn (Ocean Environmental Ltd.) for providing computer support and to the support of other colleagues working on MSE for IOTC (Iago Mosqueira, Richard Hillary, Ann Preece and Ashley Williams). The simulation framework that has been used to date is based on a set of SS III operating models (Methot Jr. & Wetzel, 2013, version 3.30.22), called from within R (R Core Team, 2021) and making use of the `r4ss` R-package (Taylor et al., 2021).

References

- Edwards, C.T.T. (2021a). Evaluations of an empirical MP for Indian Ocean Skipjack. *Research Report (IOTC-2021-WPM12-10)*
- Edwards, C.T.T. (2021b). Initial developments of an empirical MP for Indian Ocean Skipjack Tuna. *Research Report (IOTC-2021-TCMP04-07)*
- Fu, D. (2017). Indian Ocean Skipjack Tuna stock assessment 1950–2016 (Stock Synthesis). *Research Report (IOTC-2017-WPTT19-47 Rev 1)*
- Fu, D. (2020). Preliminary Indian Ocean Skipjack Stock Assessment (Stock Synthesis). *Research Report (IOTC-2020-WPTT22(AS)-10)*
- Fu, D. (2023). Indian Ocean skipjack tuna stock assessment 1950–2022 (Stock Synthesis). *Research Report (IOTC-2023-WPTT25-09)*
- Guery, L. (2020). Standardized purse seine CPUE of skipjack in the Indian Ocean for the European fleet. *Research Report (IOTC-2020-WPTT22(AS)-INF04)*
- Guery, L.; Aragno, V.; Kaplan, D.; M., G.; Baez, J.; Abascal, F.; J., U.; Marsac, F.; Merino, G.; Gaertner, D. (2020). Skipjack CPUE series standardization by fishing mode for the European purse seiners operating in the Indian Ocean. *Research Report (IOTC-2020-WPTT22(DP)-12)*
- IOTC (2015). IOTC Conservation and Management Measures, Resolution 15/10, On Target and Limit Reference Points and a Decision Framework. *IOTC-2015-CMM-R[E]*
- IOTC (2016). IOTC Conservation and Management Measures, Resolution 16/02, On Harvest Control Rules for Skipjack in the IOTC Area of Competence. *IOTC-2016-CMM-R[E]*
- IOTC (2021). IOTC Conservation and Management Measures, Resolution 21/03, On Harvest Control Rules for Skipjack in the IOTC Area of Competence. *IOTC-2021-CMM-R[E]*
- Kaplan, D.M.; Grande, M.; Alonso, M.L.R.; Báez, J.C.; Uranga, J.; Duparc, A.; Imzilen, T.; Floch, L.; Santiago, J. (2023). CPUE standardization for skipjack tuna (*Katsuwonus pelamis*) of the EU purse-seine fishery on floating objects (FOB) in the Indian Ocean. *Research Report (IOTC-2023-WPTT25(DP)-11-Rev1)*
- Medley, P.; Ahusan, M.; Adam, S. (2020a). Addendum to IOTC-2020-WPTT22(DP)-11. *Research Report (IOTC-2020-WPTT22(AS)-INF05)*
- Medley, P.; Ahusan, M.; Adam, S. (2020b). Bayesian Skipjack and Yellowfin Tuna CPUE Standardisation Model for Maldives Pole and Line 1970–2019. *Research Report (IOTC-2020-WPTT22(DP)-11)*
- Medley, P.; Ahusan, M.; Adam, S. (2023). Bayesian Skipjack and Yellowfin Tuna CPUE Standardisation Model for Maldives Pole and Line 1995–2022. *Research Report (IOTC-2023-WPTT25(DP)-13)*
- Methot Jr., R.; Wetzel, C. (2013). Stock synthesis: A biological and statistical framework for fish stock assessment and fishery management. *Fisheries Research* 142: 86–99.

- R Core Team (2021). R: A Language and Environment for Statistical Computing. R Foundation for Statistical Computing, Vienna, Austria. Version 4.0.5
- SC (2017). Report of the 20th Session of the IOTC Scientific Committee. Seychelles, 30 November – 4 December 2017. *IOTC-2017-SC20-R[E]*
- SC (2020). Report of the 23rd Session of the IOTC Scientific Committee. Online, 7 – 11 December 2020. *IOTC-2020-SC23-R[E]*
- SC (2021). Report of the 24th Session of the IOTC Scientific Committee. Online, 6 – 10 December 2021. *IOTC-2021-SC24-R[E]*
- SC (2023). Report of the 26th Session of the IOTC Scientific Committee. India, 4 – 8 December 2023 . *IOTC-2023-SC26-R[E]*
- Taylor, I.G.; Doering, K.L.; Johnson, K.F.; Wetzel, C.R.; Stewart, I.J. (2021). Beyond visualizing catch-at-age models: Lessons learned from the r4ss package about software to support stock assessments. *Fisheries Research* 239: 105924.

Appendix A: Candidate Management Procedures

Description of Management Procedures

The proposed candidate MPs contain a Harvest Control Rule (HCR) that converts an index of depletion (a_y) into a Total Allowable Catch (TAC). The shape of the HCR is defined by the maximum possible catch (C_{max}), the minimum possible catch (C_{min}), and the safety a_x and threshold a_T parameters. The HCR can be written in mathematical form as:

$$C^{TAC} = \begin{cases} C_{max} & \text{for } a_y \geq a_T \\ (C_{max} - C_{min}) \times \frac{a_y - a_x}{a_T - a_x} + C_{min} & \text{for } a_x < a_y < a_T \\ C_{min} & \text{for } a_y \leq a_x \end{cases} \quad (1)$$

For values $a_y \leq a_x$, the recommended catch is equal to C_{min} . The value of C_{min} is set at an assumed artisanal catch of 66 thousand tonnes. As a_y increases, the recommended catch also increases, until for values of $a_y \geq a_T$ the recommended catch is equal to C_{max} , which is the maximum possible TAC (Figure A1). In addition, a maximum possible TAC change is included as part of the MP definition, with notation Δ_{limit}^{TAC} .

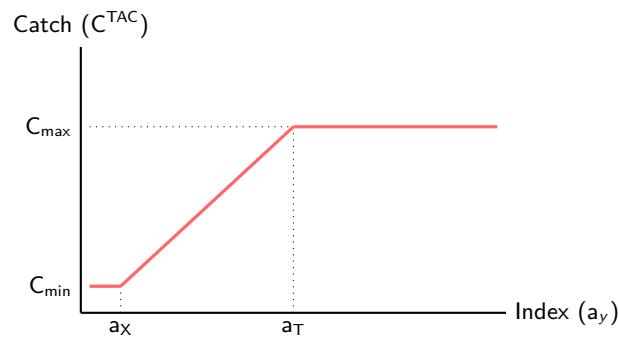


Figure A1: Schematic representation of the empirical Harvest Control Rule (Equation 1) that was proposed as part of a data-based MP (Edwards, 2021b,a). Parameters C_{min} , a_x , a_T were fixed. Each MP was tuned by adjusting C_{max} to match the tuning criteria.

The tuning process involved changing C_{max} to meet the tuning criteria, whilst keeping a_x , a_T and C_{min} fixed. Tuning parameters a_x and a_T for the TARGET MPs correspond to a depletion of approximately 10% and 40% respectively. For the STABLE MPs, a_x and a_T correspond to depletions of approximately 8% and 32% respectively. Tuning yielded the twelve candidate MPs in Table 2 with parameters values listed in Table A1.

Table A1: Tuning parameters for MPs tuned to the 50%, 60% and 70% tuning criteria.

MP	C_{min}	C_{max}	a_x	a_T	Δ_{limit}^{TAC}
MP-STABLE-ASY-50%	66.02	528.13	-1.40	-0.30	0.10%, 0.15%
MP-STABLE-ASY-60%	66.02	512.29	-1.40	-0.30	0.10%, 0.15%
MP-STABLE-ASY-70%	66.02	488.52	-1.40	-0.30	0.10%, 0.15%
MP-STABLE-SYM-50%	66.02	533.41	-1.40	-0.30	0.15%, 0.15%
MP-STABLE-SYM-60%	66.02	522.85	-1.40	-0.30	0.15%, 0.15%
MP-STABLE-SYM-70%	66.02	507.01	-1.40	-0.30	0.15%, 0.15%
MP-TARGET-ASY-50%	66.02	562.46	-1.20	-0.10	0.10%, 0.15%
MP-TARGET-ASY-60%	66.02	533.41	-1.20	-0.10	0.10%, 0.15%
MP-TARGET-ASY-70%	66.02	504.37	-1.20	-0.10	0.10%, 0.15%
MP-TARGET-SYM-50%	66.02	551.90	-1.20	-0.10	0.15%, 0.15%
MP-TARGET-SYM-60%	66.02	533.41	-1.20	-0.10	0.15%, 0.15%
MP-TARGET-SYM-70%	66.02	512.29	-1.20	-0.10	0.15%, 0.15%

Data inputs

The proposed MPs are based on standardised CPUE indices from the Maldivian PL (Medley et al., 2020b,a, 2023) and European PSLS fleets (Guery et al., 2020, Guery, 2020, Kaplan et al., 2023). These indices are both used routinely in Indian Ocean SKJ assessments (Fu, 2017, 2020, 2023). The index standardisation used in the current MSE reflect those described in (Medley et al., 2023) and (Kaplan et al., 2023), using the PL index from 1995 to 2022; and the PSLS index from 1990 to 2021 (Fu, 2023).

The log-transformed PL and PSLS indices, offset by the mean and averaged across all four seasons within the year, show similar trends over time when plotted for overlapping years (1995 to 2021 inclusive; Figure A2). On this basis, the index in Equation 2, with notation a_y , has been proposed as in input value for the MP (Edwards, 2021b), with the reference value (a^{REF}) calculated from the 1995 to 2021 period.



Figure A2: Time series of the log-transformed PL (blue) and PSLS (orange) indices between 1995 and 2021 (Fu, 2023), offset by their respective mean values. The grey line illustrates the arithmetic mean of the two log-transformed indices (Equation 2).


$$a^{\text{REF}} = \frac{1}{2 \cdot n_s \cdot n_y} \cdot \left\{ \sum_{y=1995}^{2021} \sum_s \log \left(\text{CPUE}_{y,s}^{\text{PSLS}} \right) + \sum_{y=1995}^{2021} \sum_s \log \left(\text{CPUE}_{y,s}^{\text{PL}} \right) \right\} \quad (2a)$$

$$a_y = \frac{1}{2 \cdot n_s} \cdot \left\{ \sum_s \log \left(\text{CPUE}_{y-3,s}^{\text{PSLS}} \right) + \sum_s \log \left(\text{CPUE}_{y-3,s}^{\text{PL}} \right) \right\} - a^{\text{REF}} \quad (2b)$$


Exceptional Circumstances

The process for evaluating exceptional circumstances adopted by the IOTC SC is described in Appendix 6a of the 2021 IOTC SC report (SC, 2021).


Appendix B: Simulation testing results (reference case)

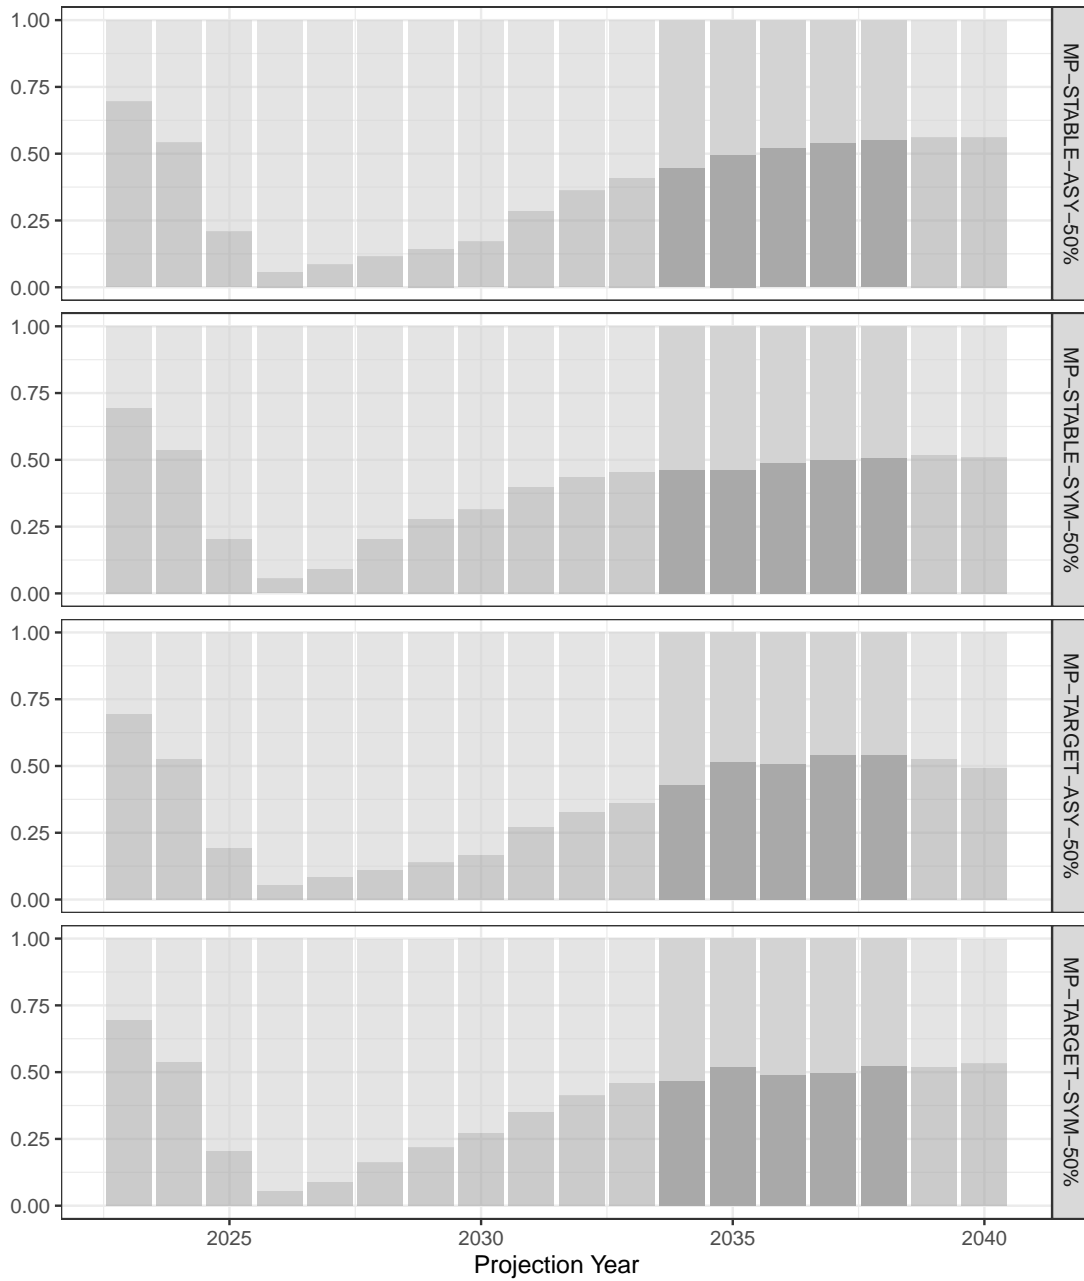

(a) MP's tuned to 50% probability of being in the target quadrant.

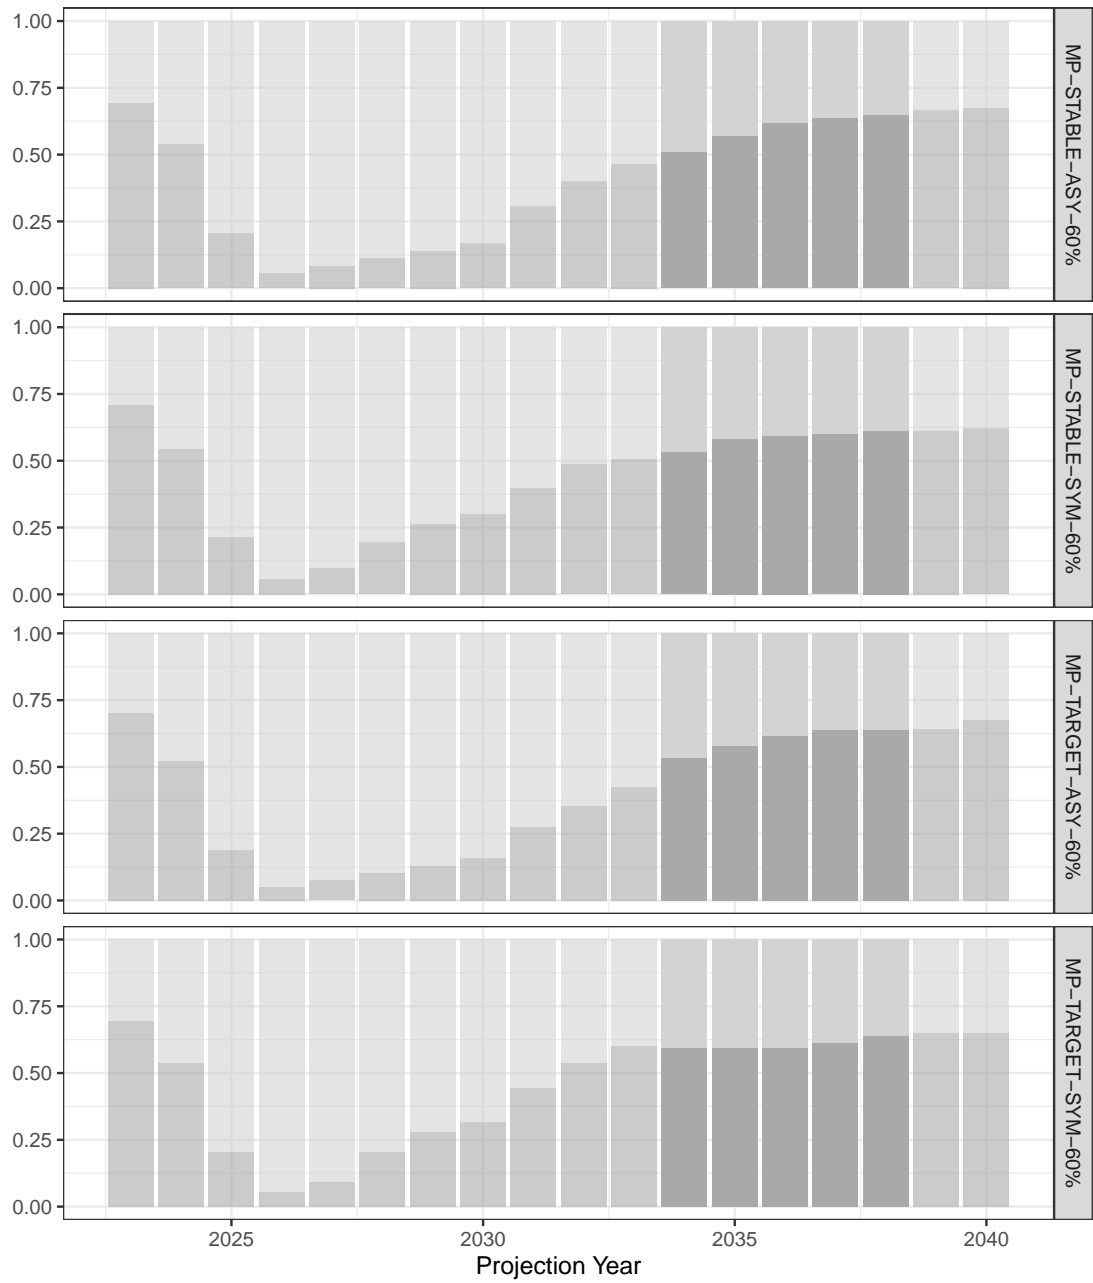


(b) MP's tuned to 60% probability of being in the target quadrant.

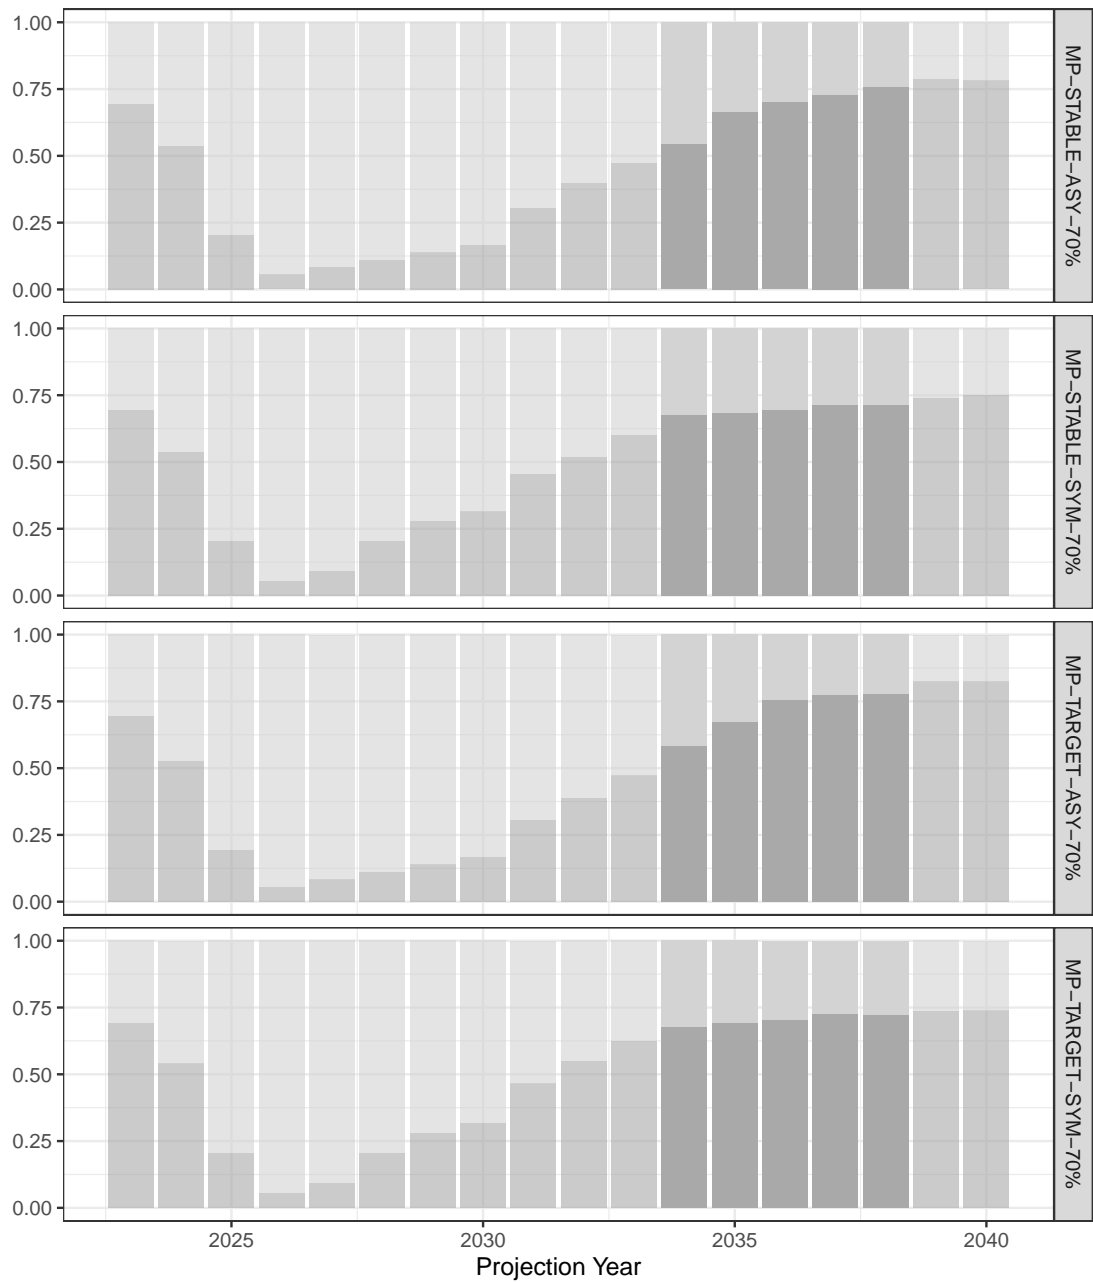


(c) MP's tuned to 70% probability of being in the target quadrant.


Figure A3: Simulated probabilities of being in the target quadrant over time, per MP (Table A1). Between 2023 and 2026 the TAC was fixed at known values (Table 1), after which the TAC was set by the MP. Each MP was tuned using the target quadrant probabilities between 2034 and 2038 inclusive.

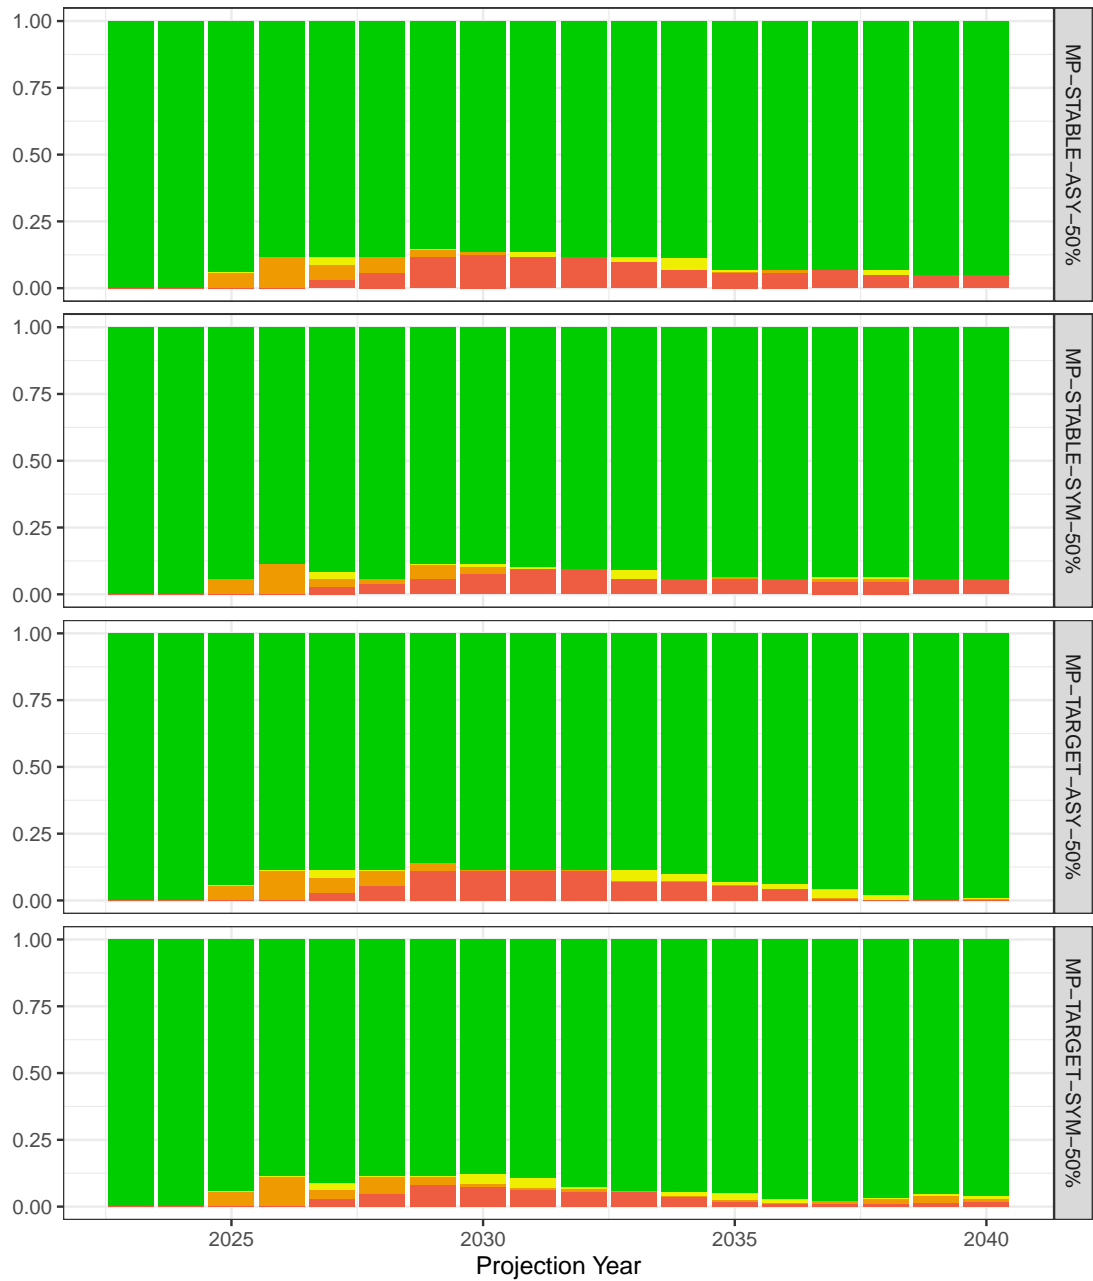

(a) MP's tuned to 50% probability of being in the target quadrant.

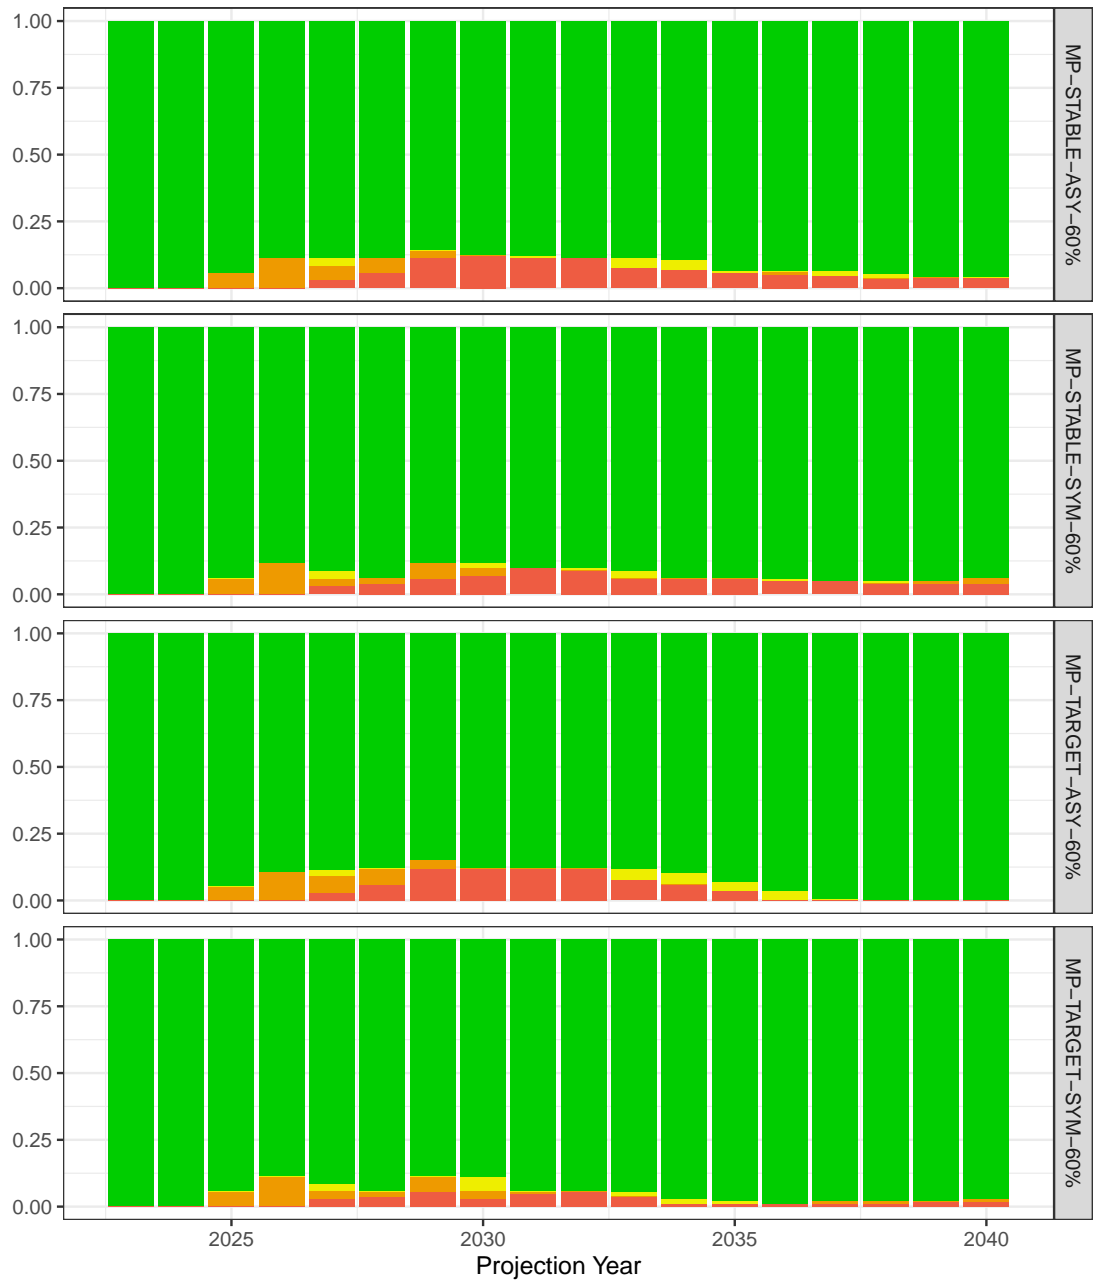

(b) MP's tuned to 60% probability of being in the target quadrant.

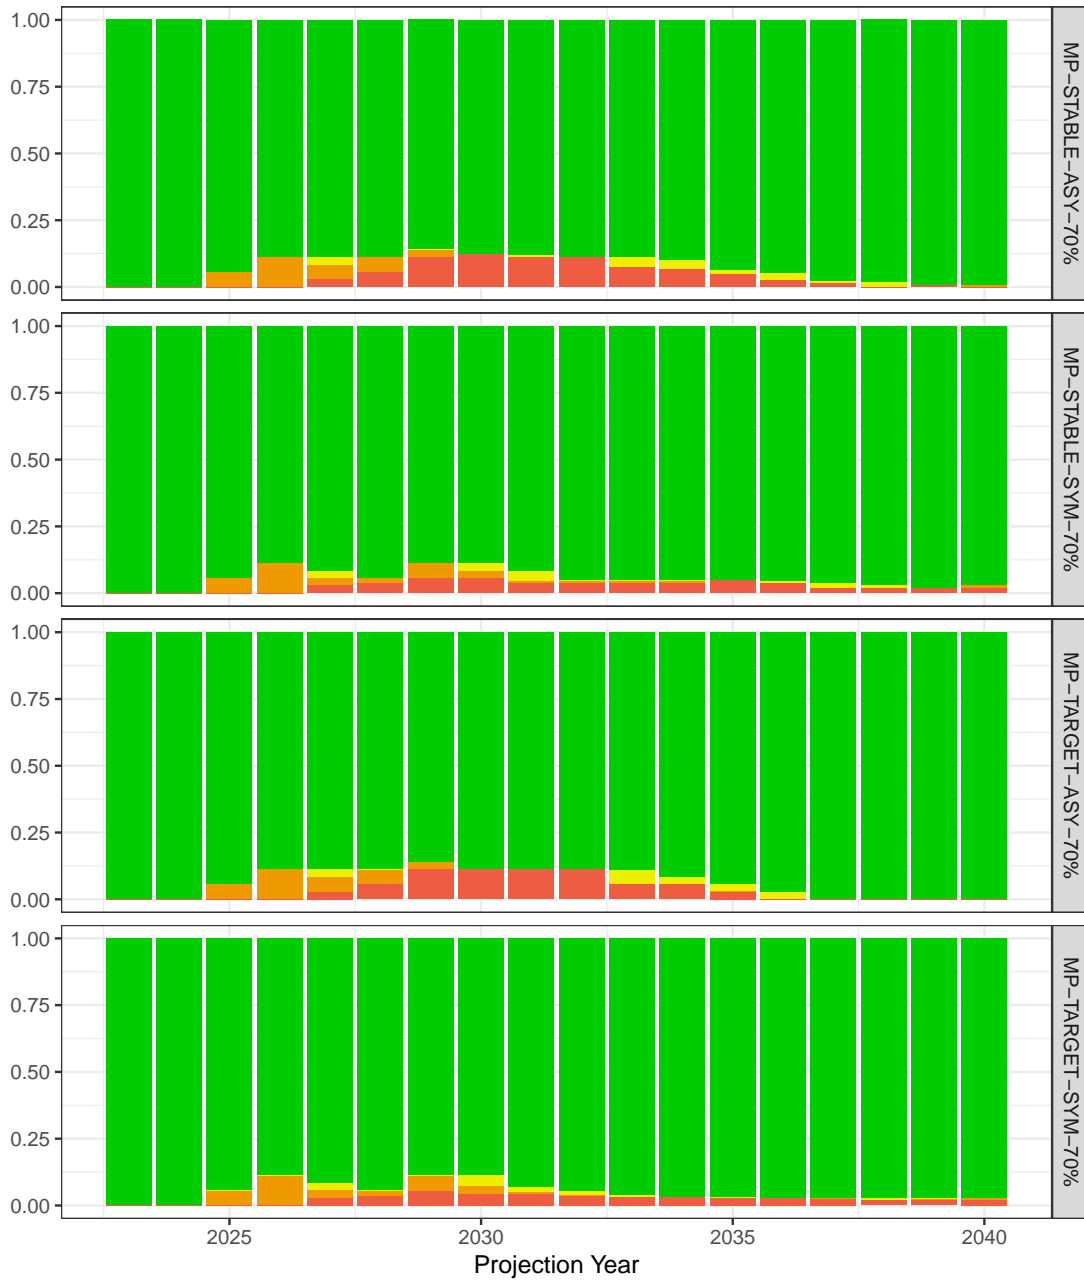

(c) MP's tuned to 70% probability of being in the target quadrant.

Figure A4: Simulated probabilities of being in each Kobe quadrant over time, per MP (Table A1). Between 2023 and 2026 the TAC was fixed at known values (Table 1), after which the TAC was set by the MP.

Table A2: Diagnostic outputs for MP evaluations over 14 year projection period (2027 to 2040). Each performance statistic is generated by first calculating the summary statistic per run and iteration across projection years, and then reporting the median and 80% quantiles across those values – unless the statistic is a probability, in which case it is calculated as a proportion across all projection years, runs and iterations simultaneously. For catch stability statistics, only five TAC implementation years (2027, 2030, 2033, 2036 and 2039 inclusive) were used, and were calculated relative to the previous TAC.

Performance Statistic	Description	Summary statistic
Catch		
C_y^{TAC}	Total Allowable Catch (three years)	Mean
C	Total realised catch	Mean
$C_{[PL]}$	Catch for PL fleet	Mean
$C_{[PSLS]}$	Catch for PSLS fleet	Mean
$C_{[PSFS]}$	Catch for PSFS fleet	Mean
$C_y/C_{40\%}$	Catch rel. to target	Geometric mean
C_y/C_{MSY}	Catch rel. to MSY	Geometric mean
Catch stability (TAC years only)		
$C_y^{TAC} \neq C_{y-1}^{TAC}$	n. TAC changes	Count
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	TAC change	Mean % change
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	TAC change > 10%	Probability
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	TAC change > 5%	Probability
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at limit	TAC change at limit	Probability
Catch rate		
$CPUE_{[PL]}$	CPUE for PL fleet	Geometric mean
$CPUE_{[PSLS]}$	CPUE for PSLS fleet	Geometric mean
Exploitation rate		
E_y	Exploitation rate	Geometric mean
$E_y/E_{40\%}$	Exploitation rel. to target	Geometric mean
E_y/E_{MSY}	Exploitation rel. to MSY	Geometric mean
Stock biomass		
B_y	Stock biomass	Mean
B_y/B_0	Depletion rel. to B_0	Geometric mean
B_y/B_{MSY}	Depletion rel. to B_{MSY}	Geometric mean
B_{MIN}/B_0	Min. depletion	Minimum
Pr. $> B_{40\%}$	$B_y > B_{40\%}$	Probability
Pr. $> B_{MSY}$	$B_y > B_{MSY}$	Probability
Pr. $> B_{20\%}$	$B_y > B_{20\%}$	Probability
Pr. $> B_{10\%}$	$B_y > B_{10\%}$	Probability
Target Quadrant		
Pr. Target Quadrant	$B_y > B_{40\%}$ and $E_y < E_{40\%}$	Probability
Kobe Quadrants		
Pr. Kobe Red	$B_y < B_{MSY}$ and $E_y > E_{MSY}$	Probability
Pr. Kobe Green	$B_y > B_{MSY}$ and $E_y < E_{MSY}$	Probability
Majuro Quadrants		
Pr. Majuro Red	$B_y < B_{20\%}$	Probability
Pr. Majuro White	$B_y > B_{20\%}$ and $E_y < E_{40\%}$	Probability

Table A3: Diagnostic outputs for evaluation of index-based MPs with a target tuning probability of 50% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	MP-STABLE-ASY-50%	MP-STABLE-SYM-50%	MP-TARGET-ASY-50%	MP-TARGET-SYM-50%
C_y^{TAC}	10 ³ tonnes	530.46 (517.14 - 532.74)	529.63 (518.24 - 529.63)	529.12 (515.03 - 543.68)	519.22 (505.62 - 535.50)
C_{Iq}^{TAC}	10 ³ tonnes	517.14	518.24	515.03	505.62
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	534.31 (534.31 - 534.31)	565.74 (565.74 - 565.74)	543.69 (534.31 - 554.54)
C	10 ³ tonnes	532.98 (517.47 - 536.60)	532.66 (514.22 - 534.24)	530.90 (507.56 - 549.76)	527.25 (505.42 - 548.62)
$C_{[PL]}$	10 ³ tonnes	107.51 (103.33 - 112.51)	107.19 (103.20 - 112.20)	108.04 (102.66 - 112.01)	107.58 (102.03 - 112.21)
$C_{[PSLS]}$	10 ³ tonnes	140.46 (129.89 - 149.62)	140.11 (130.86 - 148.40)	139.89 (128.40 - 150.61)	138.37 (128.85 - 149.55)
$C_{[PSFS]}$	10 ³ tonnes	25.95 (24.83 - 26.62)	25.89 (24.87 - 26.56)	26.05 (24.62 - 26.76)	25.78 (24.38 - 26.92)
$C_y/C_{40\%}$	Proportion	1.00 (0.89 - 1.09)	1.00 (0.89 - 1.09)	1.00 (0.91 - 1.08)	1.00 (0.90 - 1.08)
C_y/C_{MSY}	Proportion	0.91 (0.78 - 1.01)	0.91 (0.78 - 1.01)	0.91 (0.80 - 0.99)	0.91 (0.79 - 1.00)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	3.00 (2.00 - 5.00)	3.00 (2.00 - 5.00)	5.00 (4.00 - 5.00)	5.00 (4.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	4.18 (3.33 - 8.17)	3.24 (3.03 - 7.42)	8.16 (5.65 - 10.25)	9.41 (5.31 - 12.16)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.24	0.37	0.50
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.51	0.32	0.74	0.71
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.20 (0.20 - 0.20)	0.00 (0.00 - 0.00)	0.20 (0.00 - 0.20)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)
$CPUE_{[PSLS]}$	Rate	16.86 (14.50 - 19.24)	17.07 (15.07 - 19.46)	16.82 (15.08 - 18.96)	17.06 (15.21 - 19.22)
E_y	Rate	0.58 (0.48 - 0.79)	0.57 (0.48 - 0.79)	0.59 (0.50 - 0.74)	0.57 (0.48 - 0.72)
$E_y/E_{40\%}$	Proportion	1.05 (0.78 - 1.57)	1.02 (0.77 - 1.52)	1.06 (0.82 - 1.46)	1.04 (0.80 - 1.44)
E_y/E_{MSY}	Proportion	0.62 (0.37 - 0.95)	0.62 (0.37 - 0.92)	0.61 (0.39 - 0.88)	0.60 (0.38 - 0.87)
B_y	10 ³ tonnes	829.42 (601.40 - 987.68)	842.83 (616.80 - 1000.87)	814.87 (642.88 - 970.91)	841.36 (662.06 - 989.25)
B_y/B_0	Proportion	0.37 (0.27 - 0.46)	0.38 (0.28 - 0.46)	0.37 (0.29 - 0.45)	0.38 (0.29 - 0.46)
B_y/B_{MSY}	Proportion	1.54 (1.02 - 2.37)	1.58 (1.10 - 2.39)	1.58 (1.06 - 2.32)	1.60 (1.15 - 2.36)
Pr. $> B_{40\%}$	Prob.	0.38	0.41	0.38	0.41
Pr. $> B_{MSY}$	Prob.	0.92	0.94	0.93	0.95
Pr. $> B_{20\%}$	Prob.	1.00	1.00	1.00	1.00
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.38	0.40	0.36	0.39
Pr. Kobe Red	Prob.	0.07	0.06	0.06	0.04
Pr. Kobe Green	Prob.	0.90	0.92	0.92	0.93
Pr. Majuro Red	Prob.	0.00	0.00	0.00	0.00
Pr. Majuro White	Prob.	0.91	0.93	0.93	0.95

Table A4: Diagnostic outputs for evaluation of index-based MPs with a target tuning probability of 60% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	MP-STABLE-ASY-60%	MP-STABLE-SYM-60%	MP-TARGET-ASY-60%	MP-TARGET-SYM-60%
C_y^{TAC}	10 ³ tonnes	521.30 (512.86 - 526.41)	523.29 (513.93 - 523.29)	520.27 (509.66 - 532.70)	511.55 (499.73 - 524.86)
C_{Tg}^{TAC}	10 ³ tonnes	512.86	513.93	509.66	499.73
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	534.31 (534.31 - 534.31)	565.74 (565.74 - 565.74)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	521.16 (509.80 - 527.42)	524.67 (510.57 - 525.94)	519.24 (499.63 - 534.82)	516.99 (500.35 - 533.23)
$C_{[PL]}$	10 ³ tonnes	105.37 (102.23 - 110.15)	105.65 (102.48 - 110.78)	105.57 (100.90 - 109.28)	105.37 (101.33 - 109.17)
$C_{[PSLS]}$	10 ³ tonnes	137.54 (128.36 - 146.63)	138.15 (129.29 - 145.91)	136.36 (126.59 - 146.44)	135.77 (126.64 - 145.50)
$C_{[PSFS]}$	10 ³ tonnes	25.43 (24.59 - 26.08)	25.51 (24.63 - 26.22)	25.43 (24.15 - 26.10)	25.35 (24.20 - 26.11)
$C_y/C_{40\%}$	Proportion	0.99 (0.88 - 1.08)	0.99 (0.88 - 1.09)	0.98 (0.89 - 1.07)	0.97 (0.88 - 1.07)
C_y/C_{MSY}	Proportion	0.90 (0.77 - 0.99)	0.90 (0.80 - 1.00)	0.89 (0.78 - 0.98)	0.88 (0.77 - 0.98)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	3.00 (2.00 - 5.00)	2.00 (2.00 - 4.00)	5.00 (4.00 - 5.00)	5.00 (4.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	4.08 (3.70 - 8.13)	3.43 (3.43 - 7.88)	7.92 (5.16 - 9.59)	9.38 (4.71 - 11.29)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.24	0.37	0.46
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.49	0.32	0.73	0.64
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.06)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.20 (0.20 - 0.20)	0.00 (0.00 - 0.00)	0.20 (0.20 - 0.20)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)
$CPUE_{[PSLS]}$	Rate	17.24 (14.87 - 19.58)	17.38 (15.31 - 19.78)	17.27 (15.36 - 19.38)	17.45 (15.61 - 19.72)
E_y	Rate	0.56 (0.46 - 0.75)	0.55 (0.46 - 0.74)	0.57 (0.47 - 0.71)	0.54 (0.46 - 0.69)
$E_y/E_{40\%}$	Proportion	1.01 (0.76 - 1.48)	1.00 (0.78 - 1.44)	1.02 (0.78 - 1.41)	1.00 (0.77 - 1.34)
E_y/E_{MSY}	Proportion	0.60 (0.36 - 0.93)	0.60 (0.38 - 0.89)	0.59 (0.38 - 0.89)	0.57 (0.36 - 0.81)
B_y	10 ³ tonnes	843.50 (628.35 - 1010.17)	850.50 (651.40 - 1016.94)	835.47 (665.11 - 998.74)	873.25 (692.89 - 1015.49)
B_y/B_0	Proportion	0.38 (0.28 - 0.47)	0.39 (0.29 - 0.47)	0.38 (0.29 - 0.46)	0.40 (0.31 - 0.47)
B_y/B_{MSY}	Proportion	1.59 (1.02 - 2.41)	1.59 (1.11 - 2.26)	1.61 (1.05 - 2.36)	1.66 (1.23 - 2.41)
Pr. $> B_{40\%}$	Prob.	0.43	0.46	0.43	0.51
Pr. $> B_{MSY}$	Prob.	0.92	0.94	0.94	0.96
Pr. $> B_{20\%}$	Prob.	1.00	1.00	1.00	1.00
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.43	0.46	0.42	0.49
Pr. Kobe Red	Prob.	0.07	0.05	0.05	0.03
Pr. Kobe Green	Prob.	0.91	0.93	0.92	0.95
Pr. Majuro Red	Prob.	0.00	0.00	0.00	0.00
Pr. Majuro White	Prob.	0.92	0.93	0.94	0.96

Table A5: Diagnostic outputs for evaluation of index-based MPs with a target tuning probability of 70% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	MP-STABLE-ASY-70%	MP-STABLE-SYM-70%	MP-TARGET-ASY-70%	MP-TARGET-SYM-70%
C_y^{TAC}	10 ³ tonnes	512.05 (507.41 - 514.16)	513.78 (506.28 - 513.78)	511.81 (504.91 - 520.50)	503.87 (492.17 - 513.98)
C_{1q}^{TAC}	10 ³ tonnes	507.41	506.28	504.91	492.17
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	534.31 (534.31 - 534.31)	565.74 (565.74 - 565.74)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	508.17 (501.59 - 511.30)	512.39 (502.65 - 513.52)	507.88 (490.70 - 518.83)	512.47 (497.80 - 520.71)
$C_{[PL]}$	10 ³ tonnes	102.56 (100.49 - 107.37)	103.34 (100.97 - 108.09)	102.99 (98.42 - 106.92)	103.52 (100.14 - 107.94)
$C_{[PSLS]}$	10 ³ tonnes	134.38 (125.53 - 143.15)	135.20 (126.46 - 143.42)	133.39 (124.55 - 143.27)	135.13 (126.28 - 143.16)
$C_{[PSFS]}$	10 ³ tonnes	24.75 (24.13 - 25.42)	24.91 (24.18 - 25.59)	24.76 (23.73 - 25.44)	24.94 (24.00 - 25.61)
$C_y/C_{40\%}$	Proportion	0.96 (0.85 - 1.06)	0.97 (0.86 - 1.07)	0.96 (0.86 - 1.05)	0.96 (0.86 - 1.06)
C_y/C_{MSY}	Proportion	0.87 (0.75 - 0.97)	0.88 (0.75 - 0.98)	0.87 (0.75 - 0.95)	0.88 (0.76 - 0.98)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	3.00 (3.00 - 5.00)	2.00 (2.00 - 4.00)	5.00 (3.00 - 5.00)	4.00 (3.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	4.91 (4.71 - 7.44)	4.02 (4.02 - 7.38)	7.67 (4.54 - 10.22)	8.53 (4.67 - 10.96)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.25	0.38	0.46
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.50	0.46	0.70	0.63
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.20 (0.20 - 0.20)	0.00 (0.00 - 0.00)	0.20 (0.20 - 0.20)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)	0.07 (0.06 - 0.08)
$CPUE_{[PSLS]}$	Rate	17.69 (15.47 - 20.09)	17.73 (15.94 - 20.17)	17.73 (15.74 - 19.93)	17.88 (15.89 - 20.10)
E_y	Rate	0.53 (0.44 - 0.70)	0.52 (0.44 - 0.69)	0.54 (0.45 - 0.69)	0.52 (0.44 - 0.67)
$E_y/E_{40\%}$	Proportion	0.97 (0.72 - 1.41)	0.95 (0.72 - 1.35)	0.98 (0.74 - 1.34)	0.95 (0.73 - 1.34)
E_y/E_{MSY}	Proportion	0.56 (0.34 - 0.90)	0.56 (0.34 - 0.83)	0.56 (0.34 - 0.87)	0.55 (0.35 - 0.83)
B_y	10 ³ tonnes	861.77 (662.04 - 1037.19)	883.53 (690.16 - 1045.74)	867.65 (689.95 - 1026.69)	884.25 (696.07 - 1043.21)
B_y/B_0	Proportion	0.39 (0.29 - 0.48)	0.40 (0.31 - 0.48)	0.40 (0.30 - 0.48)	0.40 (0.31 - 0.48)
B_y/B_{MSY}	Proportion	1.64 (1.04 - 2.47)	1.67 (1.15 - 2.48)	1.67 (1.06 - 2.48)	1.68 (1.20 - 2.47)
Pr. $> B_{40\%}$	Prob.	0.48	0.54	0.49	0.54
Pr. $> B_{MSY}$	Prob.	0.93	0.96	0.94	0.96
Pr. $> B_{20\%}$	Prob.	1.00	1.00	1.00	1.00
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.47	0.53	0.49	0.54
Pr. Kobe Red	Prob.	0.05	0.03	0.05	0.03
Pr. Kobe Green	Prob.	0.92	0.94	0.93	0.95
Pr. Majuro Red	Prob.	0.00	0.00	0.00	0.00
Pr. Majuro White	Prob.	0.94	0.95	0.94	0.96


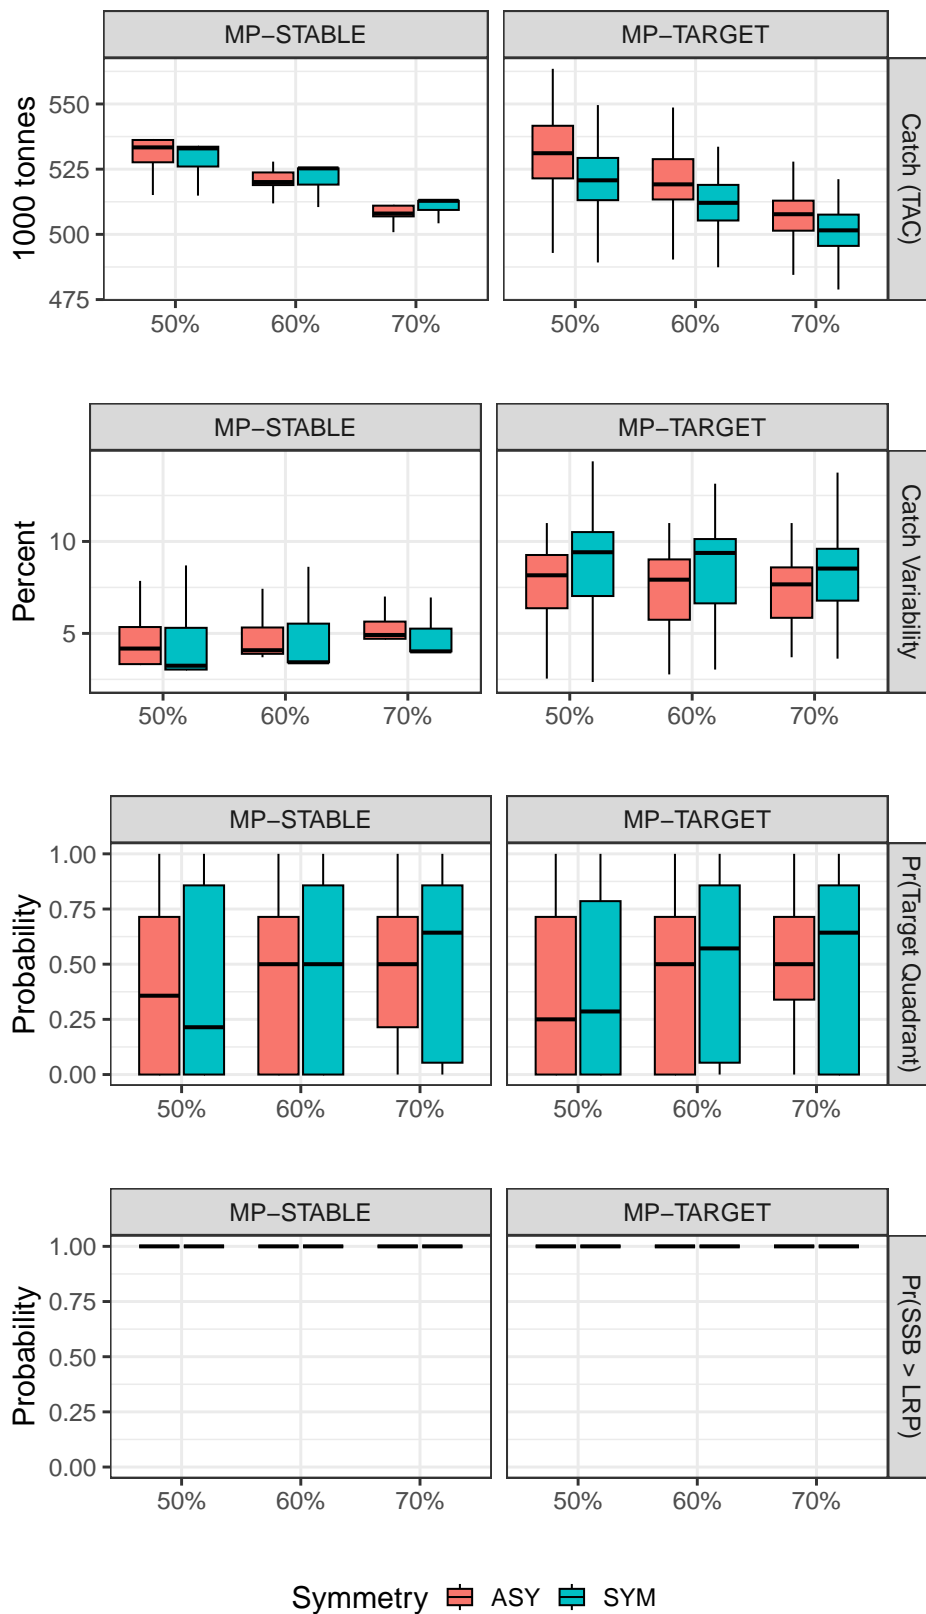



Figure A5: Summary diagnostics calculated over the projection period for MP's listed in Table A1. Boxplots show the median and distribution of values across OMs, projection years and stochastic iterations.

Relative SSB

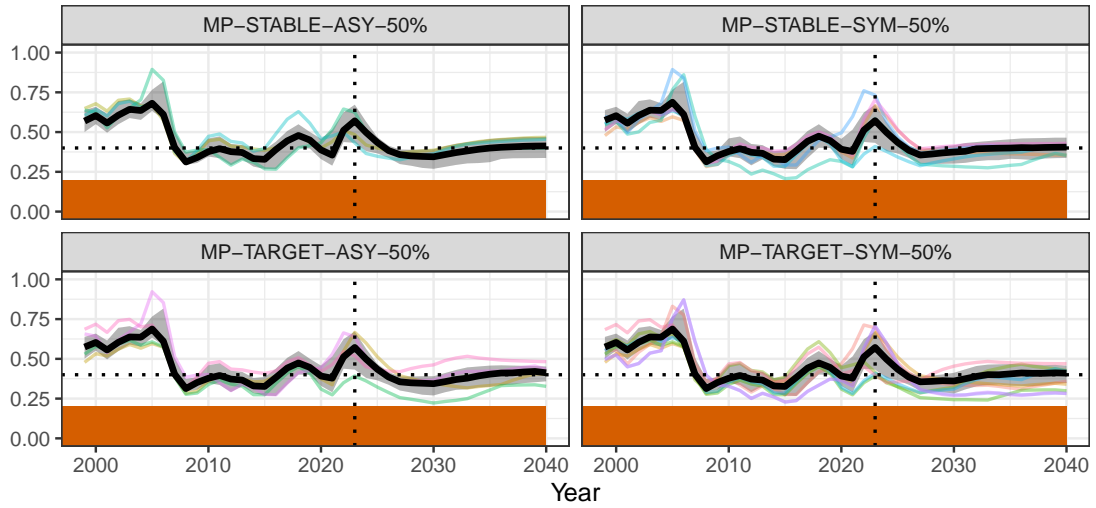


(a) MP's tuned to 50% probability of being in the target quadrant.

Relative SSB

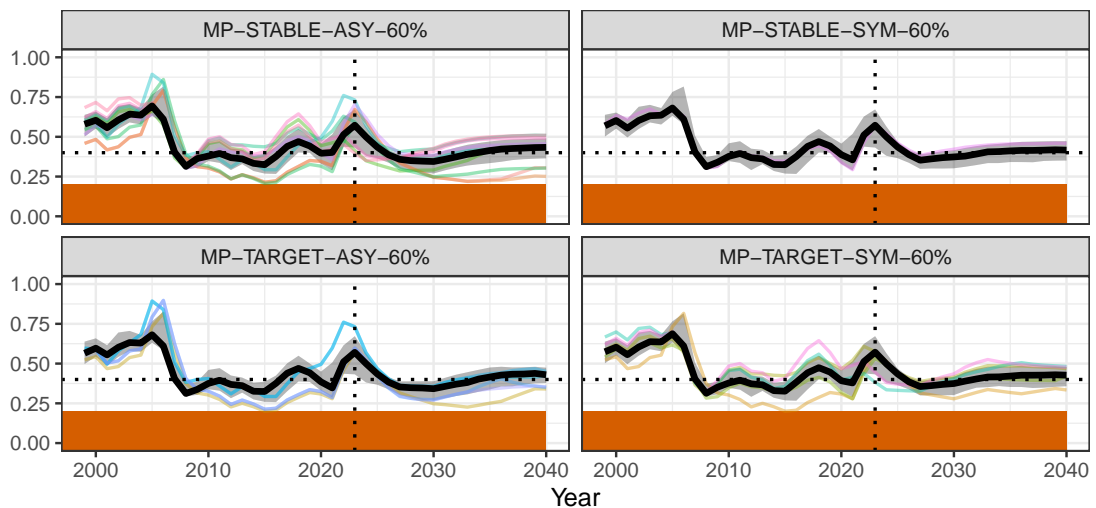

(b) MP's tuned to 60% probability of being in the target quadrant.


Relative SSB

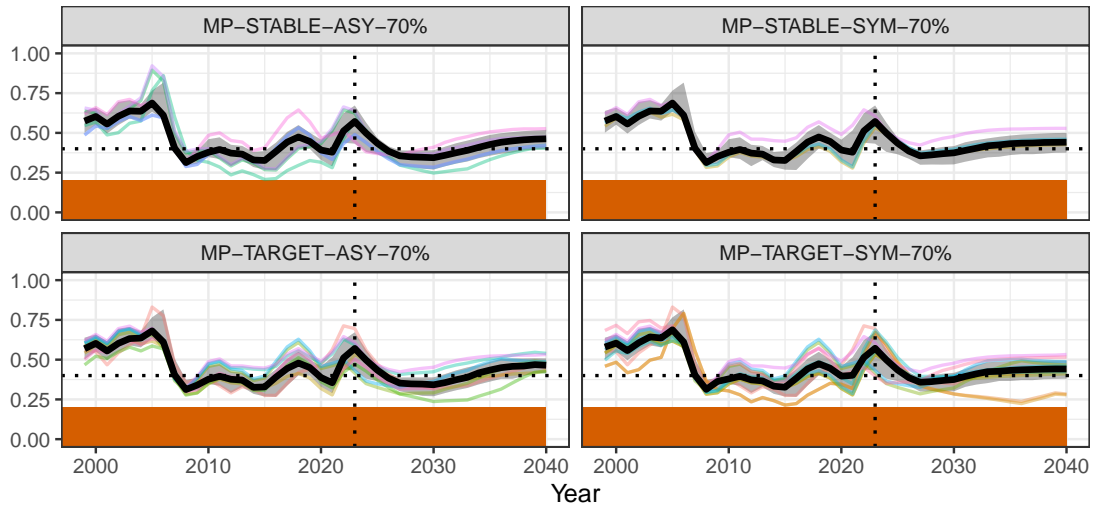

(c) MP's tuned to 70% probability of being in the target quadrant.


Figure A6: Simulated values of relative SSB (B_y/B_0) over time. Operating model projections are from 2023 onwards (vertical dashed line). The median value across OMs and stochastic iterations is shown as a black line with a sample of individual runs. The distribution of OM runs around the median is shaded grey. Values above the TRP and below the LRP are shaded in green and red respectively.

Absolute TAC

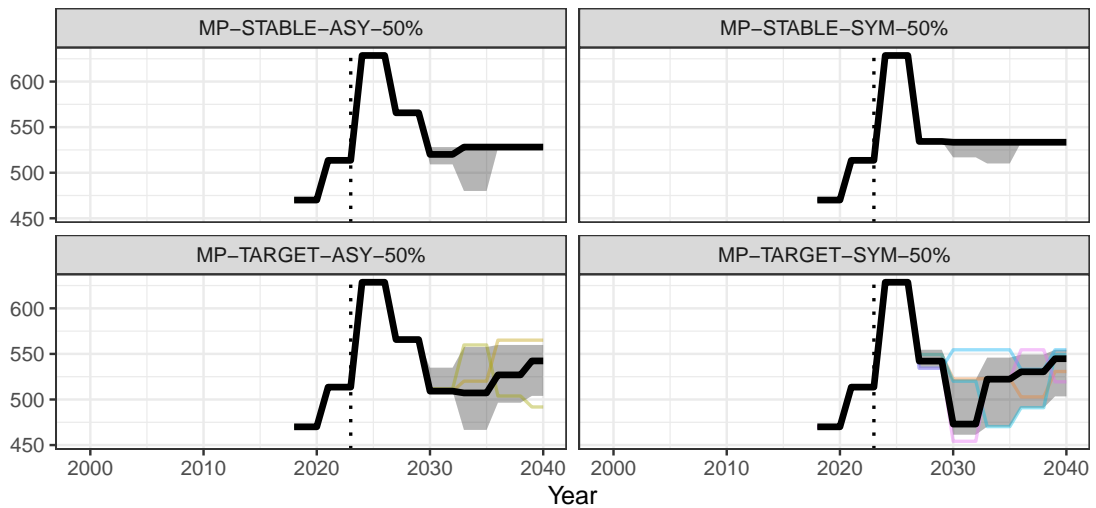


(a) MP's tuned to 50% probability of being in the target quadrant.

Absolute TAC

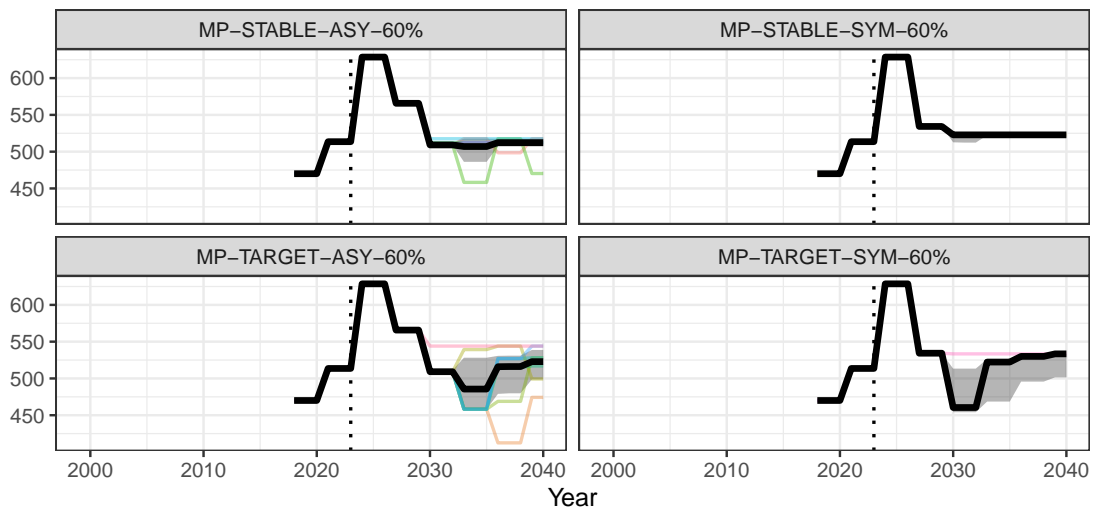


(b) MP's tuned to 60% probability of being in the target quadrant.

Absolute TAC

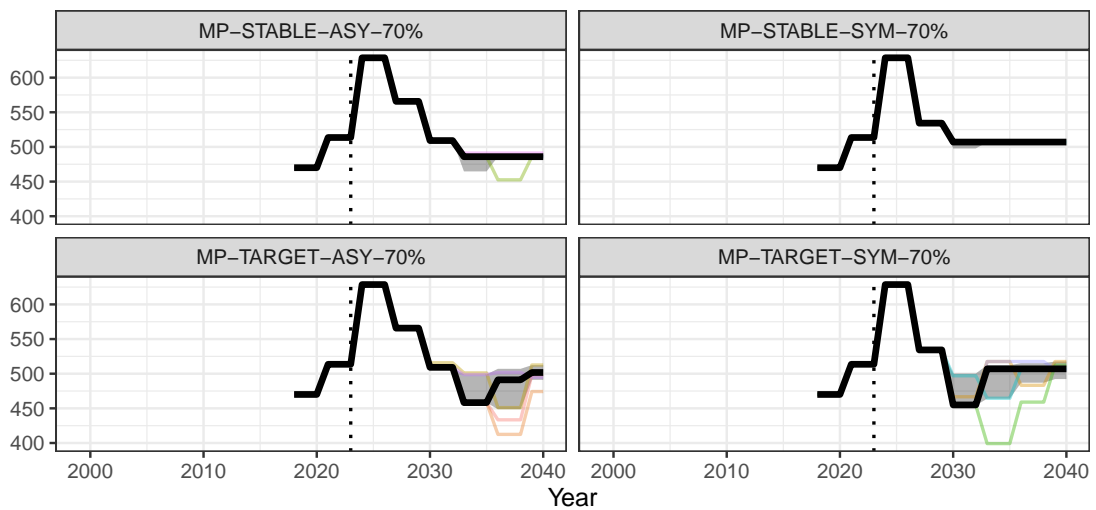


(c) MP's tuned to 70% probability of being in the target quadrant.

Figure A7: Simulated values of the TAC in 1000 tonnes over time. Operating model projections are from 2023 onwards (vertical dashed line). TAC values for 2018 to 2026 are fixed at those listed in Table 1. The MP is used to set the TAC from 2027 at three year intervals. The median value across OMs and stochastic iterations is shown as a black line with a sample of individual runs. The distribution of OM runs around the median is shaded grey.

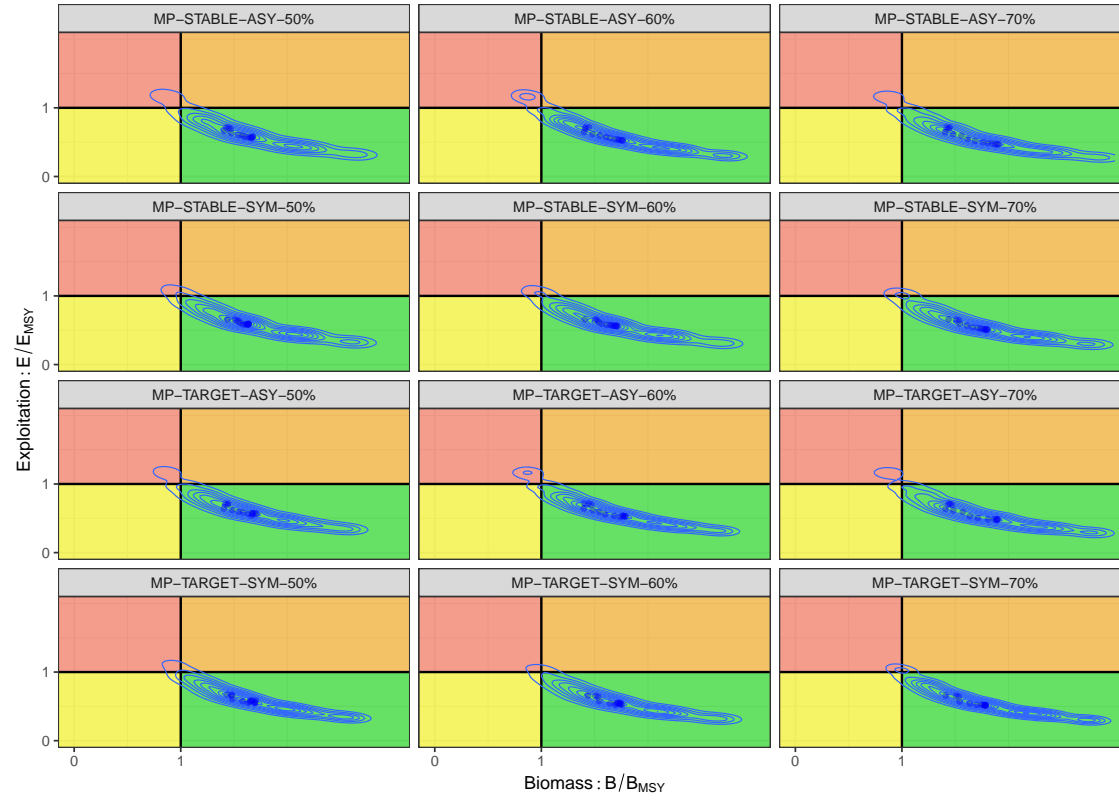


(a) Kobe phase plots

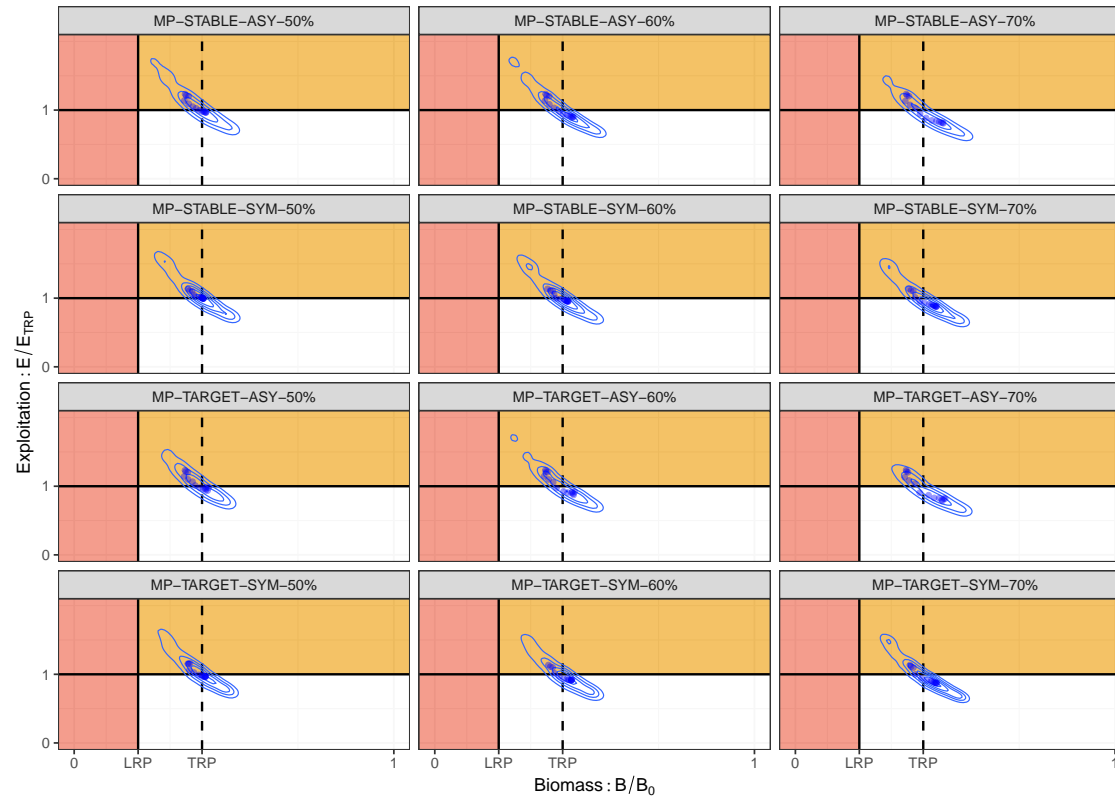


(b) Majuro phase plots

Figure A8: Kobe phase plots (top panel) and Majuro phase plots (bottom panel) for tuned MPs listed in Table A1. Contours show a two-dimensional histogram of stock status across all years for which the MP was used to set catches (i.e. 2027 to 2040), 36 operating model runs and three stochastic iterations for each run. Blue points show the median values per year for each MP. The Kobe and Majuro matrices differ in the reference points used to diagnose stock status. The Kobe matrix is defined using MSY-based reference points B_{MSY} and E_{MSY} , whereas the Majuro plot uses Target and Limit Reference Points (TRP and LRP) equal to $B_{40\%}$ and $B_{20\%}$ respectively.


Appendix C: Robustness testing (Overcatch)

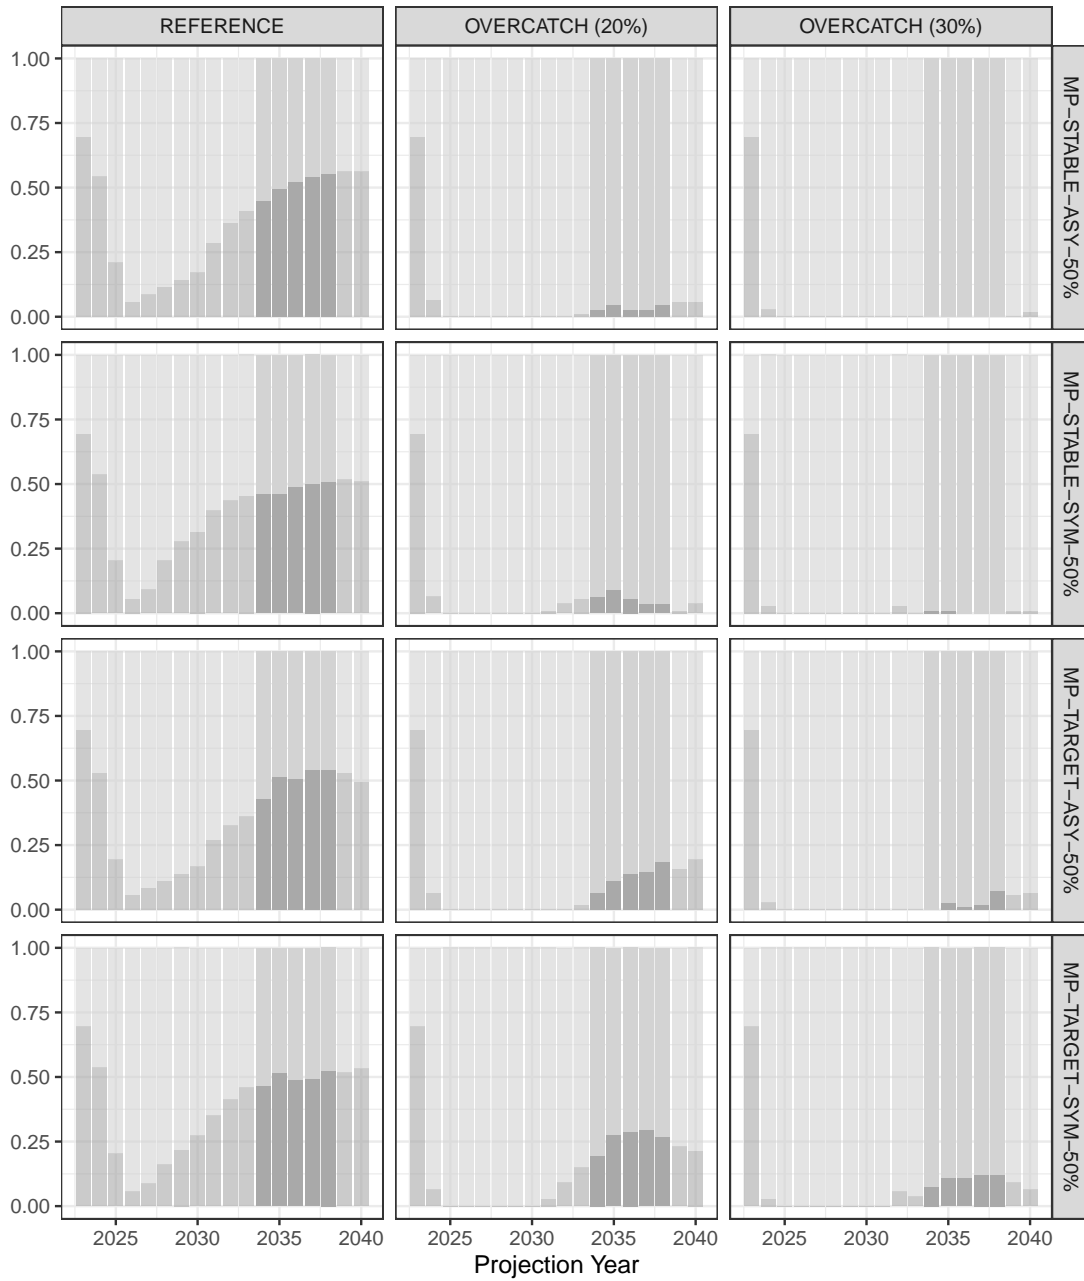

(a) MP's tuned to 50% probability of being in the target quadrant.

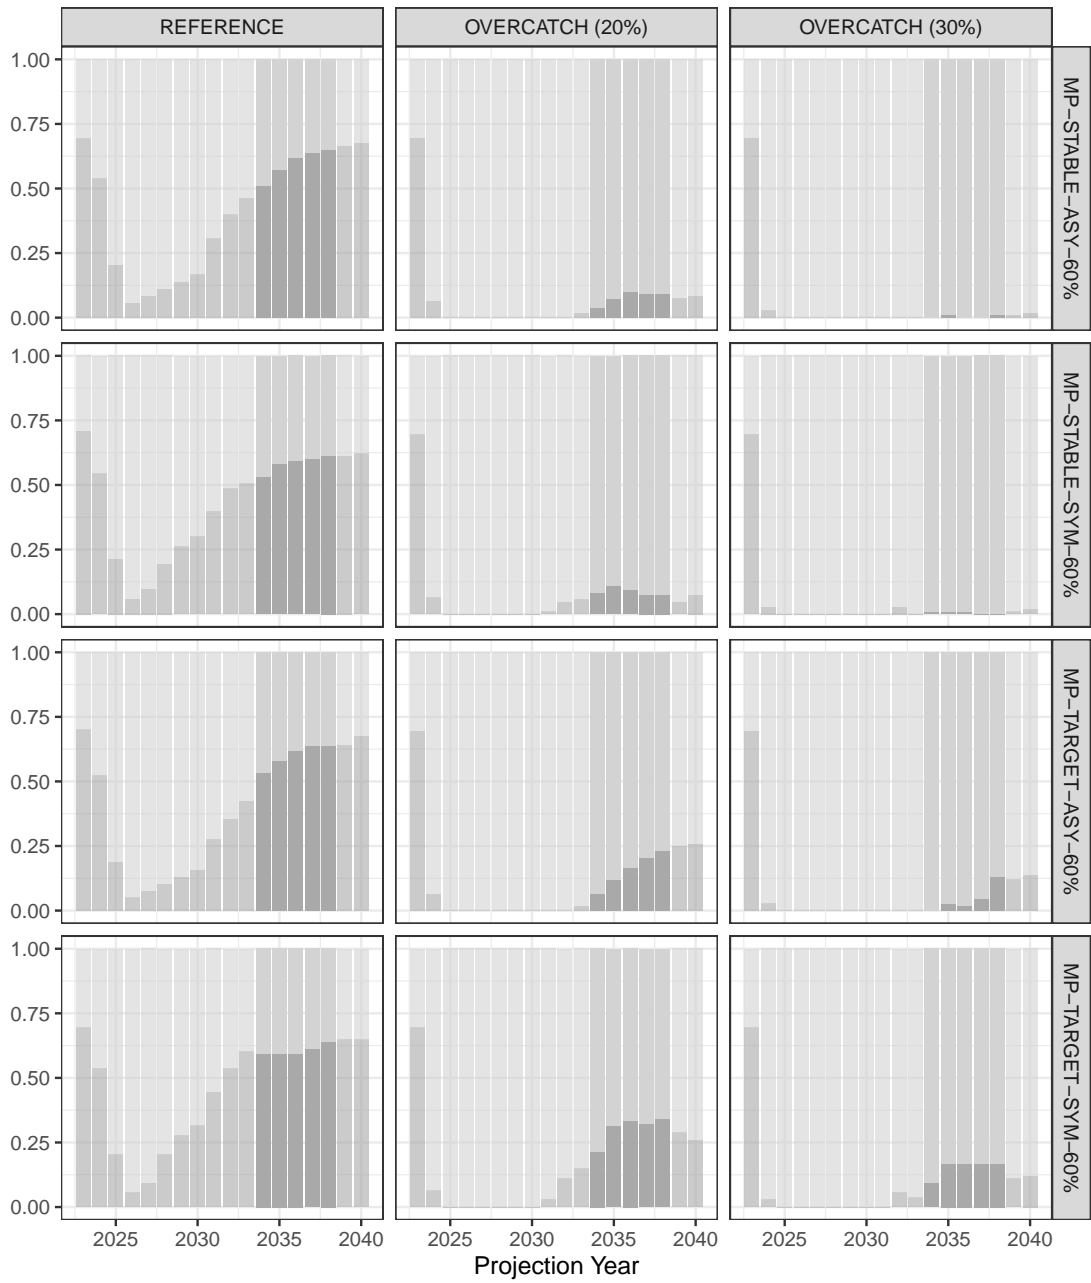


(b) MP's tuned to 60% probability of being in the target quadrant.

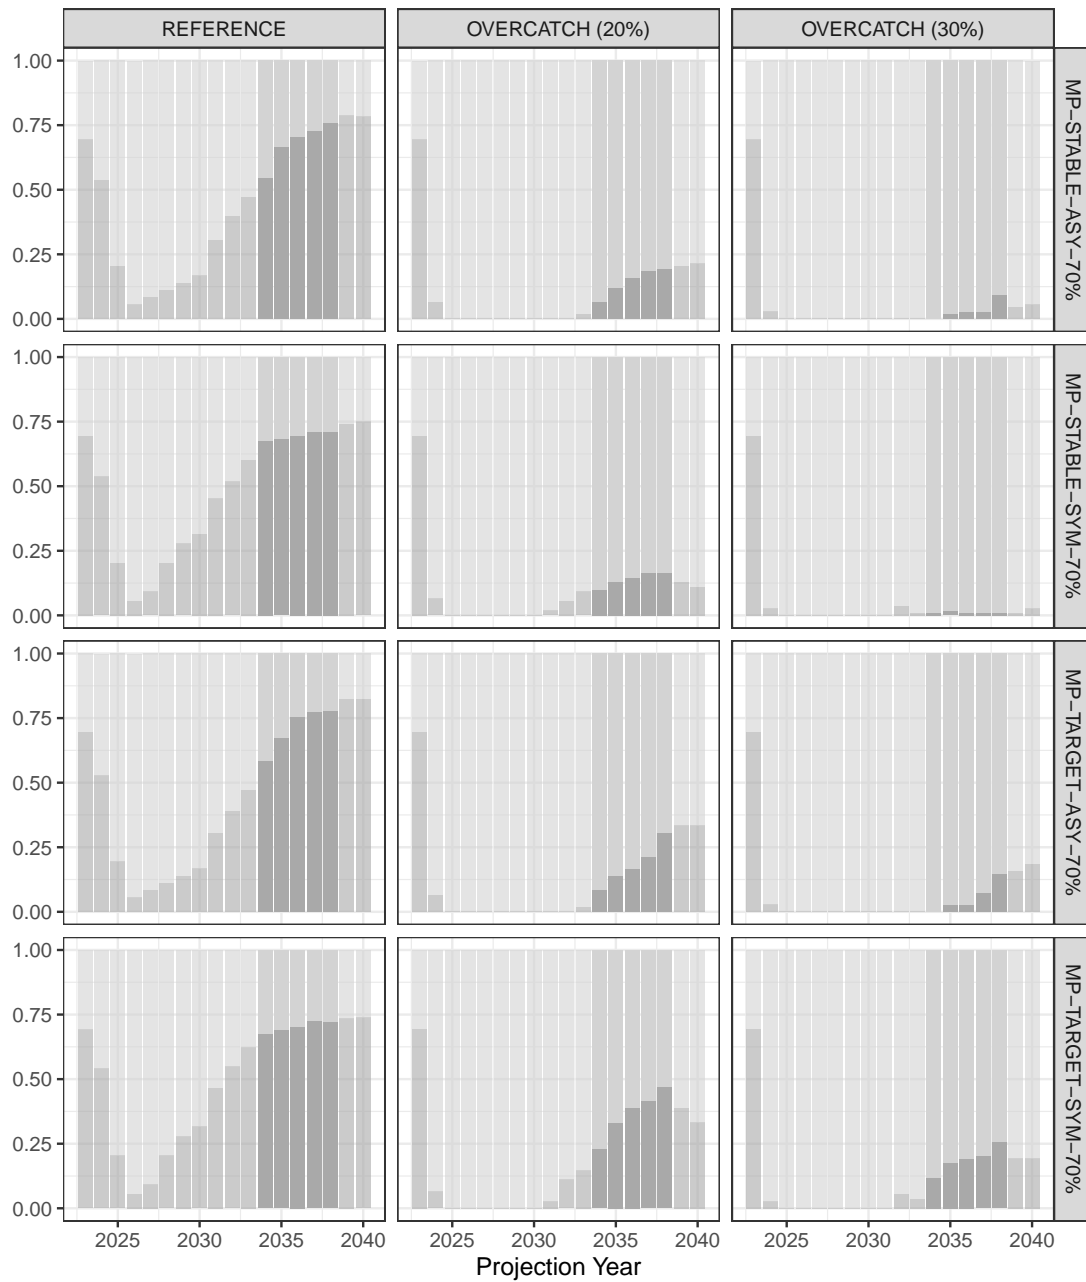

(c) MP's tuned to 70% probability of being in the target quadrant.


Figure A9: Simulated probabilities of being in the target quadrant over time, per MP (Table A1), for overcatch robustness testing. Between 2023 and 2026 the TAC was fixed at known values (Table 1), after which the TAC was set by the MP. Each MP was tuned using the target quadrant probabilities between 2034 and 2038 inclusive.

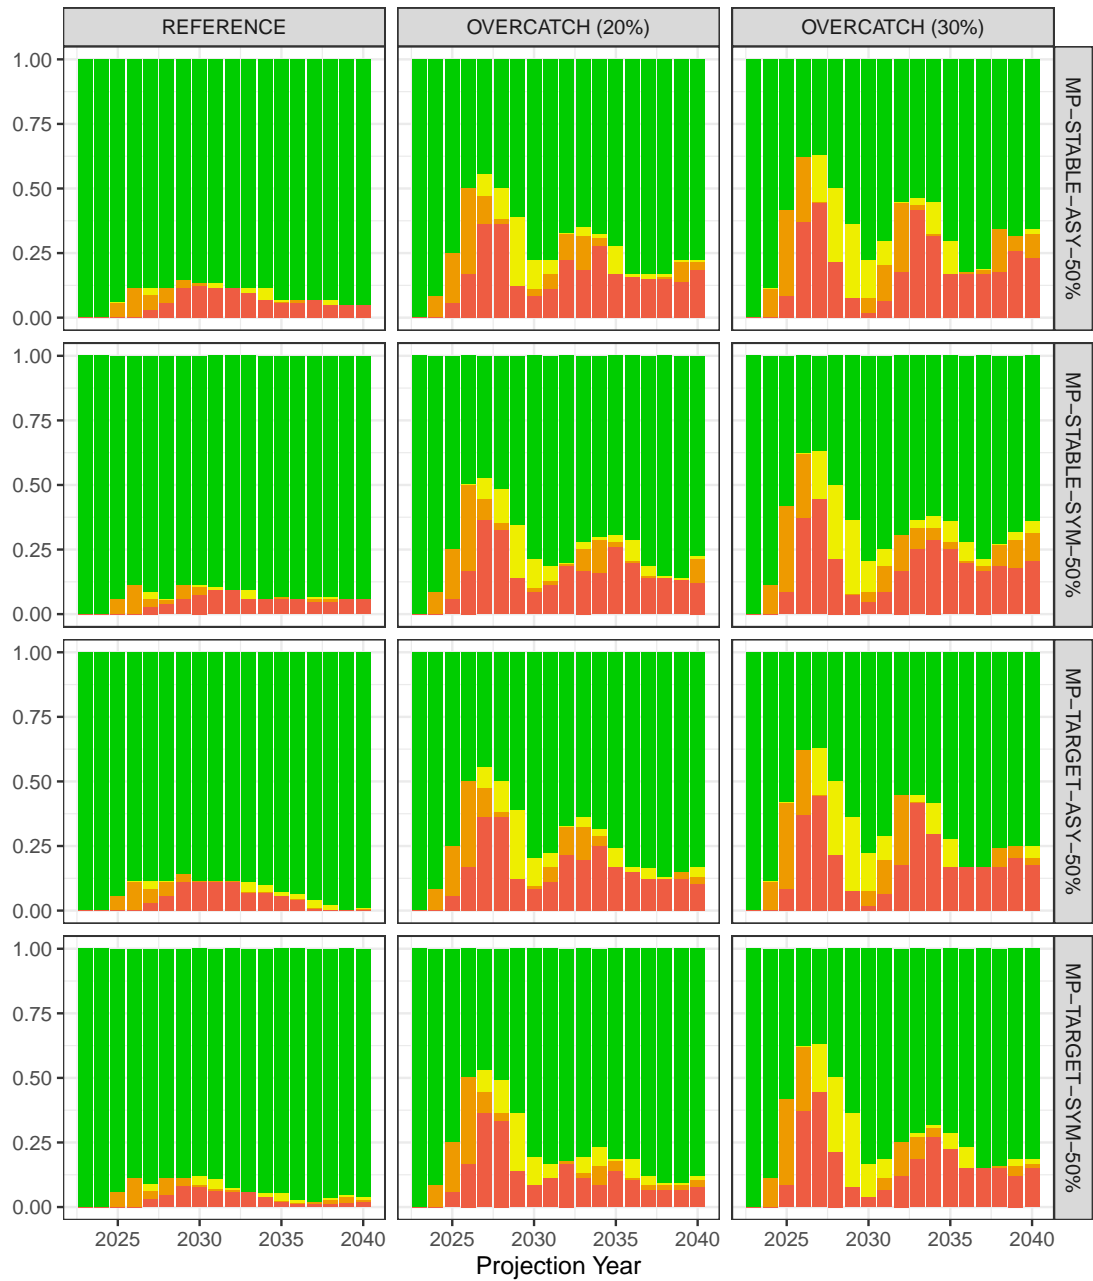

(a) MP's tuned to 50% probability of being in the target quadrant.



(b) MP's tuned to 60% probability of being in the target quadrant.

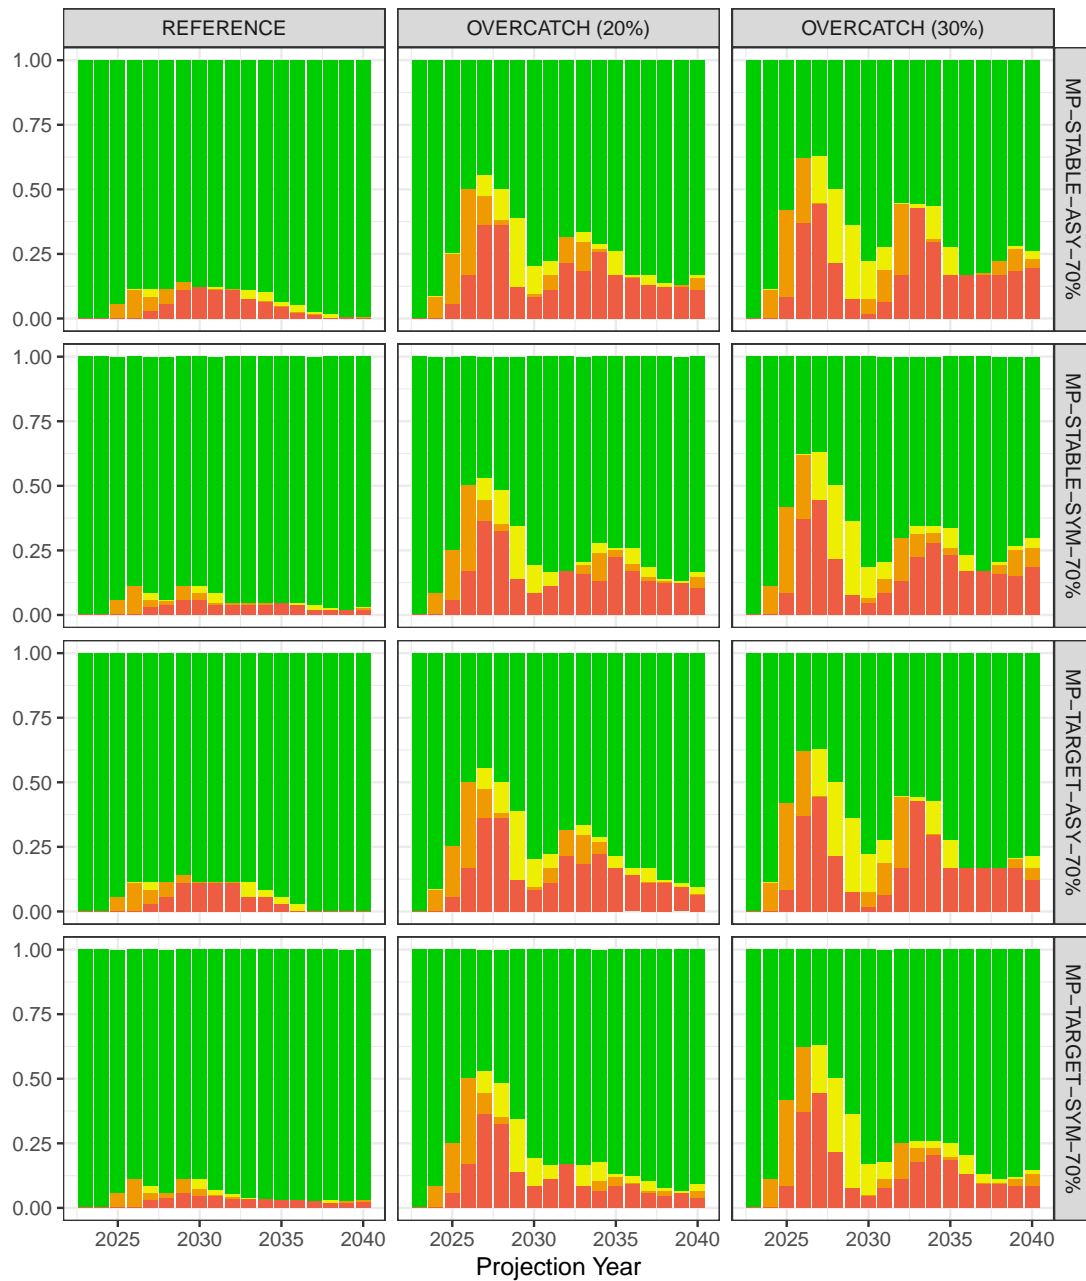

(c) MP's tuned to 70% probability of being in the target quadrant.

Figure A10: Simulated probabilities of being in each Kobe quadrant over time, per MP (Table A1), for overcatch robustness testing. Between 2023 and 2026 the TAC was fixed at known values (Table 1), after which the TAC was set by the MP.

Table A6: Diagnostic outputs per overcatch scenario for evaluation of: MP-STABLE-ASY-50% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	530.46 (517.14 - 532.74)	516.01 (504.13 - 528.95)	511.73 (498.97 - 528.44)
C_{1q}^{TAC}	10 ³ tonnes	517.14	504.13	498.97
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)
C	10 ³ tonnes	532.98 (517.47 - 536.60)	560.69 (504.08 - 611.70)	559.10 (486.38 - 624.25)
$C_{[PL]}$	10 ³ tonnes	107.51 (103.33 - 112.51)	114.81 (101.89 - 123.97)	114.88 (98.27 - 126.30)
$C_{[PSLS]}$	10 ³ tonnes	140.46 (129.89 - 149.62)	149.62 (126.94 - 170.02)	149.35 (124.10 - 174.92)
$C_{[PSFS]}$	10 ³ tonnes	25.95 (24.83 - 26.62)	27.49 (24.41 - 29.73)	27.61 (23.67 - 30.28)
$C_y/C_{40\%}$	Proportion	1.00 (0.89 - 1.09)	1.05 (1.00 - 1.08)	1.04 (0.97 - 1.07)
C_y/C_{MSY}	Proportion	0.91 (0.78 - 1.01)	0.95 (0.90 - 0.99)	0.94 (0.90 - 0.98)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	3.00 (2.00 - 5.00)	5.00 (4.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	4.18 (3.33 - 8.17)	7.63 (5.29 - 9.92)	8.10 (5.89 - 10.23)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.33	0.33
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.51	0.73	0.78
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.05 (0.04 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	16.86 (14.50 - 19.24)	13.83 (12.12 - 15.94)	13.32 (11.47 - 15.50)
E_y	Rate	0.58 (0.48 - 0.79)	0.80 (0.68 - 0.86)	0.80 (0.74 - 0.86)
$E_y/E_{40\%}$	Proportion	1.05 (0.78 - 1.57)	1.42 (1.12 - 1.78)	1.46 (1.20 - 1.80)
E_y/E_{MSY}	Proportion	0.62 (0.37 - 0.95)	0.78 (0.52 - 1.20)	0.82 (0.55 - 1.21)
B_y	10 ³ tonnes	829.42 (601.40 - 987.68)	624.94 (528.47 - 751.01)	609.81 (518.20 - 706.86)
B_y/B_0	Proportion	0.37 (0.27 - 0.46)	0.30 (0.22 - 0.36)	0.28 (0.21 - 0.34)
B_y/B_{MSY}	Proportion	1.54 (1.02 - 2.37)	1.27 (0.79 - 1.90)	1.20 (0.76 - 1.83)
Pr. $> B_{40\%}$	Prob.	0.38	0.03	0.01
Pr. $> B_{MSY}$	Prob.	0.92	0.75	0.70
Pr. $> B_{20\%}$	Prob.	1.00	0.93	0.91
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.38	0.02	0.00
Pr. Kobe Red	Prob.	0.07	0.19	0.21
Pr. Kobe Green	Prob.	0.90	0.71	0.64
Pr. Majuro Red	Prob.	0.00	0.07	0.09
Pr. Majuro White	Prob.	0.91	0.76	0.71

Table A7: Diagnostic outputs per overcatch scenario for evaluation of: MP-STABLE-ASY-60% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	521.30 (512.86 - 526.41)	511.81 (501.44 - 522.61)	506.87 (497.04 - 522.12)
C_{lg}^{TAC}	10 ³ tonnes	512.86	501.44	497.04
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)
C	10 ³ tonnes	521.16 (509.80 - 527.42)	558.72 (503.96 - 605.71)	559.05 (486.02 - 618.14)
$C_{[PL]}$	10 ³ tonnes	105.37 (102.23 - 110.15)	114.47 (101.68 - 122.66)	114.88 (98.24 - 125.56)
$C_{[PSLS]}$	10 ³ tonnes	137.54 (128.36 - 146.63)	148.20 (127.03 - 167.10)	149.29 (124.27 - 173.51)
$C_{[PSFS]}$	10 ³ tonnes	25.43 (24.59 - 26.08)	27.39 (24.40 - 29.29)	27.57 (23.65 - 30.09)
$C_y/C_{40\%}$	Proportion	0.99 (0.88 - 1.08)	1.05 (0.99 - 1.08)	1.04 (0.97 - 1.07)
C_y/C_{MSY}	Proportion	0.90 (0.77 - 0.99)	0.94 (0.89 - 0.98)	0.93 (0.89 - 0.98)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	3.00 (2.00 - 5.00)	5.00 (4.00 - 5.00)	5.00 (4.70 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	4.08 (3.70 - 8.13)	7.76 (5.39 - 10.09)	8.12 (6.09 - 9.91)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.38	0.39
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.49	0.73	0.79
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.05 (0.04 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.24 (14.87 - 19.58)	14.12 (12.18 - 16.24)	13.41 (11.60 - 15.58)
E_y	Rate	0.56 (0.46 - 0.75)	0.78 (0.67 - 0.85)	0.80 (0.72 - 0.85)
$E_y/E_{40\%}$	Proportion	1.01 (0.76 - 1.48)	1.37 (1.09 - 1.75)	1.45 (1.18 - 1.80)
E_y/E_{MSY}	Proportion	0.60 (0.36 - 0.93)	0.78 (0.50 - 1.18)	0.81 (0.54 - 1.21)
B_y	10 ³ tonnes	843.50 (628.35 - 1010.17)	636.81 (530.73 - 767.58)	615.85 (520.78 - 722.87)
B_y/B_0	Proportion	0.38 (0.28 - 0.47)	0.30 (0.22 - 0.36)	0.29 (0.21 - 0.35)
B_y/B_{MSY}	Proportion	1.59 (1.02 - 2.41)	1.27 (0.80 - 1.95)	1.21 (0.76 - 1.83)
Pr. $> B_{40\%}$	Prob.	0.43	0.06	0.01
Pr. $> B_{MSY}$	Prob.	0.92	0.75	0.71
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.91
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.43	0.04	0.00
Pr. Kobe Red	Prob.	0.07	0.19	0.20
Pr. Kobe Green	Prob.	0.91	0.71	0.65
Pr. Majuro Red	Prob.	0.00	0.06	0.09
Pr. Majuro White	Prob.	0.92	0.76	0.72

Table A8: Diagnostic outputs per overcatch scenario for evaluation of: MP-STABLE-ASY-70% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	512.05 (507.41 - 514.16)	506.52 (494.96 - 512.05)	502.47 (492.51 - 511.59)
C_{lg}^{TAC}	10 ³ tonnes	507.41	494.96	492.51
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)
C	10 ³ tonnes	508.17 (501.59 - 511.30)	552.61 (503.14 - 591.65)	555.81 (484.94 - 609.78)
$C_{[PL]}$	10 ³ tonnes	102.56 (100.49 - 107.37)	112.43 (100.97 - 119.87)	114.76 (98.20 - 123.81)
$C_{[PSLS]}$	10 ³ tonnes	134.38 (125.53 - 143.15)	145.77 (127.29 - 162.87)	147.66 (124.54 - 170.02)
$C_{[PSFS]}$	10 ³ tonnes	24.75 (24.13 - 25.42)	27.10 (24.36 - 28.75)	27.33 (23.57 - 29.56)
$C_y/C_{40\%}$	Proportion	0.96 (0.85 - 1.06)	1.03 (0.98 - 1.06)	1.03 (0.97 - 1.06)
C_y/C_{MSY}	Proportion	0.87 (0.75 - 0.97)	0.94 (0.86 - 0.97)	0.93 (0.88 - 0.97)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	3.00 (3.00 - 5.00)	5.00 (4.00 - 5.00)	5.00 (4.70 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	4.91 (4.71 - 7.44)	7.75 (6.02 - 10.15)	8.33 (6.38 - 10.02)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.34	0.38
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.50	0.77	0.78
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.05 (0.05 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.69 (15.47 - 20.09)	14.42 (12.36 - 16.52)	13.68 (11.73 - 15.88)
E_y	Rate	0.53 (0.44 - 0.70)	0.75 (0.65 - 0.85)	0.79 (0.71 - 0.85)
$E_y/E_{40\%}$	Proportion	0.97 (0.72 - 1.41)	1.33 (1.05 - 1.73)	1.42 (1.14 - 1.78)
E_y/E_{MSY}	Proportion	0.56 (0.34 - 0.90)	0.75 (0.47 - 1.17)	0.80 (0.52 - 1.20)
B_y	10 ³ tonnes	861.77 (662.04 - 1037.19)	645.74 (535.18 - 794.91)	620.27 (524.12 - 733.36)
B_y/B_0	Proportion	0.39 (0.29 - 0.48)	0.31 (0.22 - 0.38)	0.29 (0.21 - 0.35)
B_y/B_{MSY}	Proportion	1.64 (1.04 - 2.47)	1.29 (0.80 - 2.01)	1.21 (0.76 - 1.88)
Pr. $> B_{40\%}$	Prob.	0.48	0.09	0.03
Pr. $> B_{MSY}$	Prob.	0.93	0.76	0.71
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.91
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.47	0.08	0.02
Pr. Kobe Red	Prob.	0.05	0.18	0.20
Pr. Kobe Green	Prob.	0.92	0.73	0.66
Pr. Majuro Red	Prob.	0.00	0.06	0.09
Pr. Majuro White	Prob.	0.94	0.78	0.73

Table A9: Diagnostic outputs per overcatch scenario for evaluation of: MP-STABLE-SYM-50% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	529.63 (518.24 - 529.63)	504.96 (486.46 - 521.10)	500.69 (483.00 - 517.13)
C_{lg}^{TAC}	10 ³ tonnes	518.24	486.46	483.00
C_{2027}^{TAC}	10 ³ tonnes	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	532.66 (514.22 - 534.24)	558.22 (503.94 - 611.74)	556.84 (486.30 - 622.55)
$C_{[PL]}$	10 ³ tonnes	107.19 (103.20 - 112.20)	114.64 (101.73 - 122.87)	114.87 (98.58 - 125.82)
$C_{[PSLS]}$	10 ³ tonnes	140.11 (130.86 - 148.40)	148.40 (127.34 - 168.18)	147.94 (124.02 - 173.22)
$C_{[PSFS]}$	10 ³ tonnes	25.89 (24.87 - 26.56)	27.49 (24.40 - 29.63)	27.59 (23.66 - 30.08)
$C_y/C_{40\%}$	Proportion	1.00 (0.89 - 1.09)	1.04 (0.99 - 1.08)	1.04 (0.97 - 1.07)
C_y/C_{MSY}	Proportion	0.91 (0.78 - 1.01)	0.94 (0.89 - 0.99)	0.93 (0.89 - 0.98)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	3.00 (2.00 - 5.00)	5.00 (4.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	3.24 (3.03 - 7.42)	10.52 (7.00 - 13.57)	10.85 (6.46 - 13.93)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.59	0.61
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.32	0.78	0.76
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.06)	0.00 (0.00 - 0.20)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.20 (0.20 - 0.20)	0.20 (0.20 - 0.40)	0.20 (0.20 - 0.40)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.05 (0.04 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.07 (15.07 - 19.46)	14.23 (12.29 - 16.19)	13.55 (11.48 - 15.61)
E_y	Rate	0.57 (0.48 - 0.79)	0.79 (0.67 - 0.85)	0.80 (0.72 - 0.84)
$E_y/E_{40\%}$	Proportion	1.02 (0.77 - 1.52)	1.39 (1.11 - 1.75)	1.44 (1.20 - 1.77)
E_y/E_{MSY}	Proportion	0.62 (0.37 - 0.92)	0.75 (0.51 - 1.18)	0.79 (0.55 - 1.20)
B_y	10 ³ tonnes	842.83 (616.80 - 1000.87)	642.17 (542.12 - 775.68)	617.66 (528.68 - 719.72)
B_y/B_0	Proportion	0.38 (0.28 - 0.46)	0.30 (0.22 - 0.37)	0.29 (0.22 - 0.34)
B_y/B_{MSY}	Proportion	1.58 (1.10 - 2.39)	1.33 (0.80 - 1.92)	1.25 (0.77 - 1.83)
Pr. $> B_{40\%}$	Prob.	0.41	0.05	0.01
Pr. $> B_{MSY}$	Prob.	0.94	0.76	0.71
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.92
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.40	0.03	0.00
Pr. Kobe Red	Prob.	0.06	0.18	0.20
Pr. Kobe Green	Prob.	0.92	0.73	0.66
Pr. Majuro Red	Prob.	0.00	0.06	0.08
Pr. Majuro White	Prob.	0.93	0.77	0.73

Table A10: Diagnostic outputs per overcatch scenario for evaluation of: MP-STABLE-SYM-60% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	523.29 (513.93 - 523.29)	501.79 (484.41 - 515.51)	497.54 (481.07 - 512.57)
C_{lg}^{TAC}	10 ³ tonnes	513.93	484.41	481.07
C_{2027}^{TAC}	10 ³ tonnes	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	524.67 (510.57 - 525.94)	557.50 (503.61 - 604.53)	556.43 (486.30 - 621.11)
$C_{[PL]}$	10 ³ tonnes	105.65 (102.48 - 110.78)	113.82 (101.88 - 121.84)	114.87 (98.58 - 125.23)
$C_{[PSLS]}$	10 ³ tonnes	138.15 (129.29 - 145.91)	147.72 (127.45 - 166.72)	147.66 (124.18 - 172.38)
$C_{[PSFS]}$	10 ³ tonnes	25.51 (24.63 - 26.22)	27.36 (24.38 - 29.41)	27.57 (23.64 - 29.88)
$C_y/C_{40\%}$	Proportion	0.99 (0.88 - 1.09)	1.04 (0.99 - 1.08)	1.04 (0.97 - 1.07)
C_y/C_{MSY}	Proportion	0.90 (0.80 - 1.00)	0.94 (0.88 - 0.98)	0.93 (0.89 - 0.98)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	2.00 (2.00 - 4.00)	5.00 (4.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	3.43 (3.43 - 7.88)	10.61 (7.23 - 13.55)	10.86 (6.73 - 14.01)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.24	0.60	0.61
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.32	0.77	0.78
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.20 (0.20 - 0.20)	0.20 (0.20 - 0.40)	0.20 (0.20 - 0.40)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.05 (0.05 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.38 (15.31 - 19.78)	14.35 (12.34 - 16.35)	13.70 (11.58 - 15.72)
E_y	Rate	0.55 (0.46 - 0.74)	0.77 (0.65 - 0.85)	0.79 (0.71 - 0.84)
$E_y/E_{40\%}$	Proportion	1.00 (0.78 - 1.44)	1.36 (1.08 - 1.74)	1.44 (1.17 - 1.76)
E_y/E_{MSY}	Proportion	0.60 (0.38 - 0.89)	0.75 (0.50 - 1.17)	0.77 (0.54 - 1.19)
B_y	10 ³ tonnes	850.50 (651.40 - 1016.94)	647.83 (542.12 - 784.00)	619.06 (528.68 - 730.33)
B_y/B_0	Proportion	0.39 (0.29 - 0.47)	0.31 (0.23 - 0.37)	0.29 (0.22 - 0.35)
B_y/B_{MSY}	Proportion	1.59 (1.11 - 2.26)	1.33 (0.81 - 1.96)	1.27 (0.77 - 1.84)
Pr. $> B_{40\%}$	Prob.	0.46	0.06	0.02
Pr. $> B_{MSY}$	Prob.	0.94	0.77	0.72
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.92
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.46	0.05	0.01
Pr. Kobe Red	Prob.	0.05	0.18	0.19
Pr. Kobe Green	Prob.	0.93	0.73	0.67
Pr. Majuro Red	Prob.	0.00	0.06	0.08
Pr. Majuro White	Prob.	0.93	0.78	0.73

Table A11: Diagnostic outputs per overcatch scenario for evaluation of: MP-STABLE-SYM-70% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	513.78 (506.28 - 513.78)	495.11 (479.71 - 507.88)	491.82 (477.13 - 505.40)
C_{lg}^{TAC}	10 ³ tonnes	506.28	479.71	477.13
C_{2027}^{TAC}	10 ³ tonnes	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	512.39 (502.65 - 513.52)	551.48 (502.61 - 595.44)	555.20 (486.30 - 614.82)
$C_{[PL]}$	10 ³ tonnes	103.34 (100.97 - 108.09)	112.61 (101.86 - 120.41)	114.55 (98.58 - 124.43)
$C_{[PSLS]}$	10 ³ tonnes	135.20 (126.46 - 143.42)	146.45 (127.23 - 163.82)	146.96 (124.42 - 170.81)
$C_{[PSFS]}$	10 ³ tonnes	24.91 (24.18 - 25.59)	27.10 (24.34 - 28.99)	27.45 (23.63 - 29.59)
$C_y/C_{40\%}$	Proportion	0.97 (0.86 - 1.07)	1.03 (0.98 - 1.07)	1.04 (0.97 - 1.07)
C_y/C_{MSY}	Proportion	0.88 (0.75 - 0.98)	0.94 (0.87 - 0.97)	0.93 (0.88 - 0.97)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	2.00 (2.00 - 4.00)	5.00 (4.00 - 5.00)	5.00 (4.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	4.02 (4.02 - 7.38)	10.21 (7.04 - 13.20)	10.53 (7.08 - 13.33)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.25	0.57	0.59
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.46	0.77	0.79
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.20 (0.20 - 0.20)	0.20 (0.20 - 0.20)	0.20 (0.20 - 0.20)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.06 (0.05 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.73 (15.94 - 20.17)	14.56 (12.55 - 16.66)	13.93 (11.82 - 15.93)
E_y	Rate	0.52 (0.44 - 0.69)	0.75 (0.63 - 0.84)	0.79 (0.69 - 0.84)
$E_y/E_{40\%}$	Proportion	0.95 (0.72 - 1.35)	1.31 (1.05 - 1.73)	1.40 (1.14 - 1.76)
E_y/E_{MSY}	Proportion	0.56 (0.34 - 0.83)	0.74 (0.47 - 1.17)	0.76 (0.53 - 1.18)
B_y	10 ³ tonnes	883.53 (690.16 - 1045.74)	667.30 (543.80 - 797.01)	624.14 (528.74 - 746.84)
B_y/B_0	Proportion	0.40 (0.31 - 0.48)	0.31 (0.23 - 0.38)	0.29 (0.22 - 0.36)
B_y/B_{MSY}	Proportion	1.67 (1.15 - 2.48)	1.33 (0.82 - 2.03)	1.28 (0.77 - 1.86)
Pr. $> B_{40\%}$	Prob.	0.54	0.10	0.02
Pr. $> B_{MSY}$	Prob.	0.96	0.78	0.73
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.92
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.53	0.08	0.01
Pr. Kobe Red	Prob.	0.03	0.17	0.18
Pr. Kobe Green	Prob.	0.94	0.75	0.69
Pr. Majuro Red	Prob.	0.00	0.06	0.08
Pr. Majuro White	Prob.	0.95	0.79	0.75

Table A12: Diagnostic outputs per overcatch scenario for evaluation of: MP-TARGET-ASY-50% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	529.12 (515.03 - 543.68)	505.29 (492.32 - 520.68)	502.82 (487.01 - 516.69)
C_{1q}^{TAC}	10 ³ tonnes	515.03	492.32	487.01
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)
C	10 ³ tonnes	530.90 (507.56 - 549.76)	550.20 (501.57 - 597.40)	555.05 (485.30 - 611.18)
$C_{[PL]}$	10 ³ tonnes	108.04 (102.66 - 112.01)	112.55 (100.65 - 121.60)	113.92 (98.23 - 123.29)
$C_{[PSLS]}$	10 ³ tonnes	139.89 (128.40 - 150.61)	145.73 (127.03 - 165.80)	146.82 (124.55 - 169.96)
$C_{[PSFS]}$	10 ³ tonnes	26.05 (24.62 - 26.76)	26.99 (24.33 - 28.98)	27.23 (23.58 - 29.45)
$C_y/C_{40\%}$	Proportion	1.00 (0.91 - 1.08)	1.03 (0.98 - 1.07)	1.03 (0.97 - 1.05)
C_y/C_{MSY}	Proportion	0.91 (0.80 - 0.99)	0.94 (0.88 - 0.97)	0.93 (0.88 - 0.96)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	5.00 (4.00 - 5.00)	5.00 (5.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	8.16 (5.65 - 10.25)	9.08 (7.12 - 10.85)	8.86 (7.21 - 10.88)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.37	0.43	0.44
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.74	0.87	0.87
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.00)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.05 (0.05 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	16.82 (15.08 - 18.96)	14.31 (12.41 - 16.32)	13.58 (11.78 - 15.80)
E_y	Rate	0.59 (0.50 - 0.74)	0.75 (0.65 - 0.85)	0.78 (0.71 - 0.85)
$E_y/E_{40\%}$	Proportion	1.06 (0.82 - 1.46)	1.35 (1.05 - 1.71)	1.42 (1.14 - 1.78)
E_y/E_{MSY}	Proportion	0.61 (0.39 - 0.88)	0.74 (0.49 - 1.15)	0.80 (0.53 - 1.20)
B_y	10 ³ tonnes	814.87 (642.88 - 970.91)	650.98 (533.75 - 780.45)	622.40 (524.90 - 728.31)
B_y/B_0	Proportion	0.37 (0.29 - 0.45)	0.30 (0.22 - 0.37)	0.29 (0.21 - 0.35)
B_y/B_{MSY}	Proportion	1.58 (1.06 - 2.32)	1.30 (0.80 - 1.97)	1.22 (0.76 - 1.87)
Pr. $> B_{40\%}$	Prob.	0.38	0.09	0.03
Pr. $> B_{MSY}$	Prob.	0.93	0.76	0.71
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.91
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.36	0.07	0.02
Pr. Kobe Red	Prob.	0.06	0.18	0.20
Pr. Kobe Green	Prob.	0.92	0.72	0.67
Pr. Majuro Red	Prob.	0.00	0.06	0.09
Pr. Majuro White	Prob.	0.93	0.77	0.74

Table A13: Diagnostic outputs per overcatch scenario for evaluation of: MP-TARGET-ASY-60% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	520.27 (509.66 - 532.70)	502.75 (488.63 - 514.99)	498.62 (483.58 - 508.45)
C_{1q}^{TAC}	10 ³ tonnes	509.66	488.63	483.58
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)
C	10 ³ tonnes	519.24 (499.63 - 534.82)	544.98 (498.21 - 589.04)	554.64 (483.93 - 601.64)
$C_{[PL]}$	10 ³ tonnes	105.57 (100.90 - 109.28)	111.94 (99.91 - 119.79)	112.83 (98.19 - 122.39)
$C_{[PSLS]}$	10 ³ tonnes	136.36 (126.59 - 146.44)	143.83 (126.85 - 163.77)	145.85 (124.90 - 168.07)
$C_{[PSFS]}$	10 ³ tonnes	25.43 (24.15 - 26.10)	26.78 (24.17 - 28.65)	27.06 (23.51 - 29.24)
$C_y/C_{40\%}$	Proportion	0.98 (0.89 - 1.07)	1.02 (0.97 - 1.06)	1.02 (0.97 - 1.05)
C_y/C_{MSY}	Proportion	0.89 (0.78 - 0.98)	0.93 (0.87 - 0.96)	0.93 (0.87 - 0.96)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	5.00 (4.00 - 5.00)	5.00 (5.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	7.92 (5.16 - 9.59)	9.06 (7.23 - 10.92)	9.10 (7.47 - 10.64)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.37	0.44	0.46
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.73	0.87	0.90
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.05 (0.05 - 0.06)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.27 (15.36 - 19.38)	14.43 (12.43 - 16.59)	13.71 (11.79 - 16.08)
E_y	Rate	0.57 (0.47 - 0.71)	0.74 (0.64 - 0.85)	0.78 (0.70 - 0.85)
$E_y/E_{40\%}$	Proportion	1.02 (0.78 - 1.41)	1.32 (1.03 - 1.69)	1.40 (1.12 - 1.77)
E_y/E_{MSY}	Proportion	0.59 (0.38 - 0.89)	0.73 (0.47 - 1.14)	0.79 (0.51 - 1.20)
B_y	10 ³ tonnes	835.47 (665.11 - 998.74)	655.57 (540.20 - 789.24)	630.80 (525.37 - 742.53)
B_y/B_0	Proportion	0.38 (0.29 - 0.46)	0.31 (0.22 - 0.38)	0.29 (0.21 - 0.36)
B_y/B_{MSY}	Proportion	1.61 (1.05 - 2.36)	1.31 (0.80 - 2.02)	1.24 (0.77 - 1.91)
Pr. $> B_{40\%}$	Prob.	0.43	0.10	0.04
Pr. $> B_{MSY}$	Prob.	0.94	0.77	0.71
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.91
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.42	0.09	0.03
Pr. Kobe Red	Prob.	0.05	0.17	0.19
Pr. Kobe Green	Prob.	0.92	0.73	0.67
Pr. Majuro Red	Prob.	0.00	0.06	0.09
Pr. Majuro White	Prob.	0.94	0.79	0.74

Table A14: Diagnostic outputs per overcatch scenario for evaluation of: MP-TARGET-ASY-70% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	511.81 (504.91 - 520.50)	499.18 (483.58 - 507.35)	494.32 (483.58 - 503.82)
C_{Iq}^{TAC}	10 ³ tonnes	504.91	483.58	483.58
C_{2027}^{TAC}	10 ³ tonnes	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)	565.74 (565.74 - 565.74)
C	10 ³ tonnes	507.88 (490.70 - 518.83)	540.43 (494.84 - 581.49)	552.29 (484.80 - 596.66)
$C_{[PL]}$	10 ³ tonnes	102.99 (98.42 - 106.92)	110.87 (98.91 - 117.46)	111.96 (97.68 - 121.21)
$C_{[PSLS]}$	10 ³ tonnes	133.39 (124.55 - 143.27)	143.00 (125.85 - 161.65)	144.76 (125.09 - 166.22)
$C_{[PSFS]}$	10 ³ tonnes	24.76 (23.73 - 25.44)	26.42 (23.99 - 28.21)	26.85 (23.47 - 28.97)
$C_y/C_{40\%}$	Proportion	0.96 (0.86 - 1.05)	1.01 (0.97 - 1.05)	1.02 (0.96 - 1.05)
C_y/C_{MSY}	Proportion	0.87 (0.75 - 0.95)	0.92 (0.85 - 0.96)	0.92 (0.86 - 0.95)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	5.00 (3.00 - 5.00)	5.00 (5.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	7.67 (4.54 - 10.22)	9.03 (7.28 - 10.75)	9.38 (8.12 - 10.38)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.38	0.47	0.47
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.70	0.89	0.91
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.00)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.06 (0.05 - 0.07)	0.05 (0.04 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.73 (15.74 - 19.93)	14.64 (12.47 - 16.81)	13.91 (11.82 - 16.27)
E_y	Rate	0.54 (0.45 - 0.69)	0.72 (0.62 - 0.83)	0.77 (0.68 - 0.84)
$E_y/E_{40\%}$	Proportion	0.98 (0.74 - 1.34)	1.28 (1.01 - 1.67)	1.37 (1.09 - 1.77)
E_y/E_{MSY}	Proportion	0.56 (0.34 - 0.87)	0.73 (0.46 - 1.13)	0.78 (0.50 - 1.20)
B_y	10 ³ tonnes	867.65 (689.95 - 1026.69)	655.80 (545.26 - 798.00)	631.57 (526.47 - 756.30)
B_y/B_0	Proportion	0.40 (0.30 - 0.48)	0.31 (0.23 - 0.39)	0.29 (0.21 - 0.36)
B_y/B_{MSY}	Proportion	1.67 (1.06 - 2.48)	1.31 (0.81 - 2.06)	1.24 (0.77 - 1.94)
Pr. $> B_{40\%}$	Prob.	0.49	0.12	0.05
Pr. $> B_{MSY}$	Prob.	0.94	0.77	0.72
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.91
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.49	0.11	0.04
Pr. Kobe Red	Prob.	0.05	0.17	0.19
Pr. Kobe Green	Prob.	0.93	0.74	0.68
Pr. Majuro Red	Prob.	0.00	0.06	0.09
Pr. Majuro White	Prob.	0.94	0.79	0.75

Table A15: Diagnostic outputs per overcatch scenario for evaluation of: MP-TARGET-SYM-50% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	519.22 (505.62 - 535.50)	487.18 (473.79 - 502.22)	481.06 (465.29 - 502.08)
C_{1q}^{TAC}	10 ³ tonnes	505.62	473.79	465.29
C_{2027}^{TAC}	10 ³ tonnes	543.69 (534.31 - 554.54)	534.31 (534.31 - 534.88)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	527.25 (505.42 - 548.62)	541.29 (499.38 - 588.69)	548.92 (485.84 - 600.96)
$C_{[PL]}$	10 ³ tonnes	107.58 (102.03 - 112.21)	110.26 (100.44 - 118.73)	112.24 (98.51 - 121.50)
$C_{[PSLS]}$	10 ³ tonnes	138.37 (128.85 - 149.55)	142.75 (125.85 - 161.52)	144.28 (125.35 - 166.61)
$C_{[PSFS]}$	10 ³ tonnes	25.78 (24.38 - 26.92)	26.59 (24.12 - 28.63)	26.85 (23.52 - 29.22)
$C_y/C_{40\%}$	Proportion	1.00 (0.90 - 1.08)	1.01 (0.96 - 1.05)	1.02 (0.96 - 1.05)
C_y/C_{MSY}	Proportion	0.91 (0.79 - 1.00)	0.92 (0.85 - 0.96)	0.92 (0.87 - 0.96)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	5.00 (4.00 - 5.00)	5.00 (5.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	9.41 (5.31 - 12.16)	11.97 (9.28 - 14.63)	11.81 (9.42 - 14.58)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.50	0.72	0.72
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.71	0.85	0.84
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.20 (0.00 - 0.20)	0.20 (0.20 - 0.40)	0.20 (0.20 - 0.40)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.06 (0.05 - 0.07)	0.05 (0.05 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.06 (15.21 - 19.22)	14.87 (13.20 - 17.00)	14.37 (12.65 - 16.37)
E_y	Rate	0.57 (0.48 - 0.72)	0.71 (0.60 - 0.82)	0.76 (0.65 - 0.84)
$E_y/E_{40\%}$	Proportion	1.04 (0.80 - 1.44)	1.24 (0.99 - 1.63)	1.34 (1.06 - 1.71)
E_y/E_{MSY}	Proportion	0.60 (0.38 - 0.87)	0.70 (0.47 - 1.04)	0.73 (0.50 - 1.15)
B_y	10 ³ tonnes	841.36 (662.06 - 989.25)	699.50 (562.41 - 819.07)	642.98 (533.96 - 774.94)
B_y/B_0	Proportion	0.38 (0.29 - 0.46)	0.33 (0.25 - 0.39)	0.31 (0.22 - 0.37)
B_y/B_{MSY}	Proportion	1.60 (1.15 - 2.36)	1.36 (0.89 - 2.04)	1.31 (0.79 - 1.94)
Pr. $> B_{40\%}$	Prob.	0.41	0.17	0.08
Pr. $> B_{MSY}$	Prob.	0.95	0.80	0.75
Pr. $> B_{20\%}$	Prob.	1.00	0.94	0.92
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.39	0.15	0.06
Pr. Kobe Red	Prob.	0.04	0.14	0.17
Pr. Kobe Green	Prob.	0.93	0.78	0.72
Pr. Majuro Red	Prob.	0.00	0.06	0.08
Pr. Majuro White	Prob.	0.95	0.83	0.78

Table A16: Diagnostic outputs per overcatch scenario for evaluation of: MP-TARGET-SYM-60% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	511.55 (499.73 - 524.86)	483.12 (467.59 - 498.80)	479.11 (462.28 - 497.56)
C_{lg}^{TAC}	10 ³ tonnes	499.73	467.59	462.28
C_{2027}^{TAC}	10 ³ tonnes	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	516.99 (500.35 - 533.23)	536.96 (495.95 - 583.15)	544.91 (485.70 - 596.42)
$C_{[PL]}$	10 ³ tonnes	105.37 (101.33 - 109.17)	109.34 (99.76 - 117.43)	111.52 (98.50 - 120.88)
$C_{[PSLS]}$	10 ³ tonnes	135.77 (126.64 - 145.50)	141.82 (125.07 - 159.72)	143.60 (125.25 - 164.64)
$C_{[PSFS]}$	10 ³ tonnes	25.35 (24.20 - 26.11)	26.41 (23.93 - 28.33)	26.64 (23.52 - 29.00)
$C_y/C_{40\%}$	Proportion	0.97 (0.88 - 1.07)	1.00 (0.95 - 1.05)	1.01 (0.96 - 1.05)
C_y/C_{MSY}	Proportion	0.88 (0.77 - 0.98)	0.92 (0.85 - 0.95)	0.92 (0.86 - 0.95)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	5.00 (4.00 - 5.00)	5.00 (5.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	9.38 (4.71 - 11.29)	12.12 (9.37 - 15.00)	12.17 (9.29 - 14.47)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.46	0.72	0.72
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.64	0.85	0.85
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.06)	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.20 (0.20 - 0.20)	0.20 (0.20 - 0.40)	0.20 (0.20 - 0.40)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.06 (0.05 - 0.07)	0.06 (0.05 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.45 (15.61 - 19.72)	15.08 (13.32 - 17.15)	14.49 (12.77 - 16.54)
E_y	Rate	0.54 (0.46 - 0.69)	0.69 (0.59 - 0.82)	0.74 (0.63 - 0.83)
$E_y/E_{40\%}$	Proportion	1.00 (0.77 - 1.34)	1.22 (0.97 - 1.62)	1.31 (1.03 - 1.67)
E_y/E_{MSY}	Proportion	0.57 (0.36 - 0.81)	0.69 (0.46 - 1.00)	0.72 (0.49 - 1.13)
B_y	10 ³ tonnes	873.25 (692.89 - 1015.49)	716.31 (567.42 - 835.32)	652.13 (541.76 - 782.70)
B_y/B_0	Proportion	0.40 (0.31 - 0.47)	0.33 (0.25 - 0.40)	0.31 (0.23 - 0.38)
B_y/B_{MSY}	Proportion	1.66 (1.23 - 2.41)	1.39 (0.91 - 2.06)	1.32 (0.81 - 1.96)
Pr. $> B_{40\%}$	Prob.	0.51	0.20	0.10
Pr. $> B_{MSY}$	Prob.	0.96	0.81	0.75
Pr. $> B_{20\%}$	Prob.	1.00	0.95	0.93
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.49	0.17	0.08
Pr. Kobe Red	Prob.	0.03	0.13	0.16
Pr. Kobe Green	Prob.	0.95	0.79	0.73
Pr. Majuro Red	Prob.	0.00	0.05	0.07
Pr. Majuro White	Prob.	0.96	0.84	0.79

Table A17: Diagnostic outputs per overcatch scenario for evaluation of: MP-TARGET-SYM-70% (see Table A1 for the list of MP definitions).

Performance Statistic	Units	REFERENCE	OVERCATCH (20%)	OVERCATCH (30%)
C_y^{TAC}	10 ³ tonnes	503.87 (492.17 - 513.98)	479.73 (464.54 - 492.21)	474.16 (460.23 - 489.36)
C_{lg}^{TAC}	10 ³ tonnes	492.17	464.54	460.23
C_{2027}^{TAC}	10 ³ tonnes	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)	534.31 (534.31 - 534.31)
C	10 ³ tonnes	512.47 (497.80 - 520.71)	531.28 (490.39 - 574.64)	538.40 (484.56 - 588.43)
$C_{[PL]}$	10 ³ tonnes	103.52 (100.14 - 107.94)	108.67 (98.75 - 115.90)	110.11 (98.18 - 119.42)
$C_{[PSLS]}$	10 ³ tonnes	135.13 (126.28 - 143.16)	140.47 (122.99 - 157.16)	142.05 (124.55 - 162.49)
$C_{[PSFS]}$	10 ³ tonnes	24.94 (24.00 - 25.61)	26.12 (23.72 - 27.88)	26.43 (23.52 - 28.63)
$C_y/C_{40\%}$	Proportion	0.96 (0.86 - 1.06)	0.99 (0.94 - 1.04)	1.00 (0.95 - 1.04)
C_y/C_{MSY}	Proportion	0.88 (0.76 - 0.98)	0.91 (0.84 - 0.95)	0.91 (0.85 - 0.94)
$C_y^{TAC} \neq C_{y-1}^{TAC}$	Count	4.00 (3.00 - 5.00)	5.00 (5.00 - 5.00)	5.00 (5.00 - 5.00)
$ C_y^{TAC}/C_{y-1}^{TAC} - 1 $	Percent	8.53 (4.67 - 10.96)	12.23 (9.45 - 14.48)	12.08 (9.44 - 13.96)
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 10\%$	Prob.	0.46	0.74	0.73
Pr. $ C_y^{TAC}/C_{y-1}^{TAC} - 1 > 5\%$	Prob.	0.63	0.87	0.85
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at upp. limit	Prob.	0.00 (0.00 - 0.00)	0.00 (0.00 - 0.20)	0.00 (0.00 - 0.20)
Pr. $C_y^{TAC}/C_{y-1}^{TAC} - 1$ at low. limit	Prob.	0.20 (0.20 - 0.20)	0.20 (0.20 - 0.40)	0.20 (0.20 - 0.40)
$CPUE_{[PL]}$	Rate	0.07 (0.06 - 0.08)	0.06 (0.05 - 0.07)	0.06 (0.05 - 0.06)
$CPUE_{[PSLS]}$	Rate	17.88 (15.89 - 20.10)	15.29 (13.54 - 17.36)	14.66 (12.92 - 16.75)
E_y	Rate	0.52 (0.44 - 0.67)	0.67 (0.57 - 0.81)	0.72 (0.62 - 0.83)
$E_y/E_{40\%}$	Proportion	0.95 (0.73 - 1.34)	1.18 (0.94 - 1.60)	1.27 (1.01 - 1.64)
E_y/E_{MSY}	Proportion	0.55 (0.35 - 0.83)	0.67 (0.45 - 0.98)	0.71 (0.48 - 1.08)
B_y	10 ³ tonnes	884.25 (696.07 - 1043.21)	734.92 (575.33 - 854.00)	673.36 (548.70 - 798.84)
B_y/B_0	Proportion	0.40 (0.31 - 0.48)	0.34 (0.25 - 0.40)	0.31 (0.23 - 0.38)
B_y/B_{MSY}	Proportion	1.68 (1.20 - 2.47)	1.41 (0.95 - 2.09)	1.33 (0.84 - 2.00)
Pr. $> B_{40\%}$	Prob.	0.54	0.23	0.13
Pr. $> B_{MSY}$	Prob.	0.96	0.82	0.77
Pr. $> B_{20\%}$	Prob.	1.00	0.95	0.93
Pr. $> B_{10\%}$	Prob.	1.00	1.00	1.00
Pr. Target Quadrant	Prob.	0.54	0.20	0.10
Pr. Kobe Red	Prob.	0.03	0.12	0.14
Pr. Kobe Green	Prob.	0.95	0.80	0.75
Pr. Majuro Red	Prob.	0.00	0.05	0.07
Pr. Majuro White	Prob.	0.96	0.85	0.81